

15-135-20093-0000


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Ness County, Sec. 35 Twp. 18S Rge. 21W (E) (W)  
Location as "NE/CNW/SW" or footage from lines c SW SW  
Lease Owner Hellar Drilling Company, Inc.  
Lease Name Mellick Well No. 1  
Office Address 1014 Union Center, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed December 10 19 67  
Application for plugging filed December 10 19 67  
Application for plugging approved December 10 19 67  
Plugging commenced December 10 19 67  
Plugging completed December 10 19 67  
Reason for abandonment of well or producing formation Dry Hole

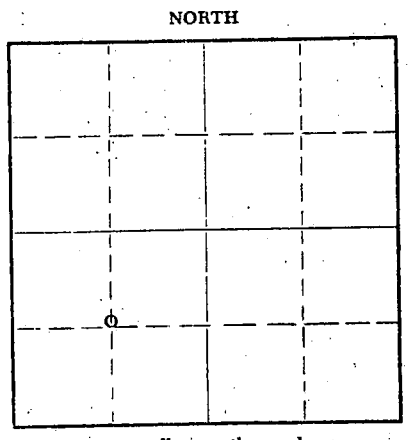

Locate well correctly on above Section Plat.

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Box 582, Hays, Kansas  
Producing formation Depth to top Bottom Total Depth of Well 4282 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	250'	8 5/8"	250'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set Plug:  
660'/100 sacks cement  
240'/25 sacks cement  
40'/10 sacks cement

RECEIVED  
STATE CORPORATION COMMISSION  
WICHITA, KANSAS

DEC 22 1967  
12-22-67

RECEIVED  
DEC 20 1967  
CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Hellar Drilling Company, Inc.  
Address 1014 Union Center, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
D. L. Hellar, Pres. of Hellar Drilling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) D. L. Hellar, President  
1014 Union Center, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of December, 19 67

My commission expires March 25, 1968

Catherine Darcey  
Catherine Darcey -- Notary Public.

15.35.20093-0800

DRILLER'S LOG

COMPANY: Hellar Drilling Company, Inc., Wichita, Kansas  
 CONTRACTOR: Hellar Drilling Company, Inc., Wichita, Kansas  
 LEASE: #1 Mellick  
 LOCATION: c SW SW 35-18S-21W, Ness County, Kansas  
 COMMENCED: November 29, 1967  
 COMPLETED: December 10, 1967  
 CASING: Set 8 5/8" @ 250'/185 sacks cement/collar&cellar

0-251	Shale
251-1400	Shale & Shells
1400-1417	Anhydrite
1417-1700	Shale & Shells
1700-2190	Shale-Salt Section
2190-2380	Shale-Ft. Riley Chert & Lime
2380-2490	Ft. Riley Chert & Lime
2490-3623	Lime & Shale
3623-3865	K. C. Lime
3865-3938	Lime
3938-4087	K. C. Lime
4087-4156	Lime
4156-4176	Lime & Cherokee Sand
4176-4230	Cherokee & Cong.
4230-4235	Cong. Chert
4235-4240	Cong.
4240-4282	Miss.
<del>4282</del> -4282	Rotary Total Depth

RECEIVED  
 STATE CORPORATION COMMISSION  
 DEC 29 1967  
 CONSERVATION DIVISION  
 WICHITA, KANSAS

D & A

STATE OF KANSAS     )  
                           ) SS  
 COUNTY OF SEDGWICK )

I, D. L. Hellar, do hereby certify that the above and foregoing is a true and correct copy of the log of the #1 Mellick, located in c SW SW 35-18S-21W, Ness County, Kansas, as reflected by the files of the Hellar Drilling Company, Inc.

HELLAR DRILLING COMPANY, INC.

By: *D. L. Hellar*  
 President - D. L. Hellar

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 19th day of December, 1967.

*Catherine Dargay*  
 Notary Public - Catherine Dargay