

15135-00566-0006

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Ness County, Sec. 35 Twp. 18 Rge. 21 (E) W (W)
NW SE

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner Stickle Drilling Company
Lease Name Ryersee Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 7-28-65 19____
Plugging completed 7-31-65 19____
Reason for abandonment of well or producing formation Depleted.

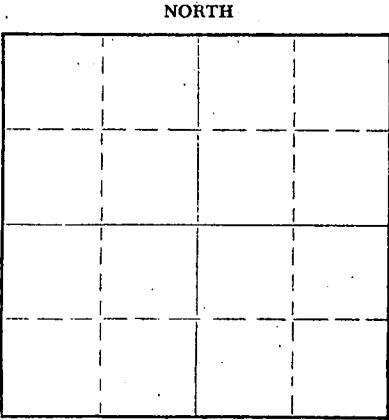

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Dilbert Leiker
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4247 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	209'	None
				5-1/2"	4226'	2476'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Well flowing water, could not plug off bottom. Pulled 10 joints of 5 1/2" casing and pumped in 10 sacks of weight mud and 10 sacks of gel mud to kill well. Pulled 40 joints of 5 1/2" casing and pumped 11 sacks of gel mud. Pulled balance of 5 1/2" casing and pumped in 125 sacks of cement to cap well.

RECEIVED
STATE CORPORATION COMMISSION

AUG 6 - 1965

8-6-65

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING COMPLETE.

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
Noel J. Knight

(employee of owner) or (~~SWORN OPERATOR~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Noel J. Knight

Chase, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of August, 1965

My commission expires May 20, 1968

Milton J. Volin

Notary Public.

Stickle Drilling Company, et al
Tulsa, Oklahoma

#109
15135-005660000
Tulsa, Oklahoma
June 4, 1956

CONTRACTOR: Stickle Drilling Company
Drilling Commenced: May 16, 1956
Drilling Completed: May 30, 1956

Ryerson #1 - C NW SE
Section 35-183-21W,
Ness County, Kansas.

DRILLERS LOG

Depth Figures Indicated Base of Formation

Sand	50
Shale	210
Shale & Shells	550
Sand	645
Red Bed	760
Dakota Sand	1015
Red Bed, Shale & Salt	1305
Anhydrite	1340
Shale & Shells	2080
Anhydrite No. 2	2120
Lime & Shale	2360
Shale	2470
Sandy Lime	2550
Lime & Shale	2790
Broken Sandy Lime	2895
Lime & Shale	3060
Shale & Lime	3165
Lime & Shale	3425
Lime	3465
Lime & Shale	3585
Lime	3620
Kansas City Lime	3650
Lime	3761
Kansas City Lime	3798
Lime	3895
Kansas City Lime	3933
Lime & Shale	4045
Ft. Scott Lime	4095
Shale & Sand	4127
Sand & Shale	4140
Sand	4155
Lime & Shale	4178
Conglomerate	4182
Mississippi	4195
Lime & Chert	4225
Lime	4230 TD

I, Frank E. Stickle, hereby certify the above to be a true and complete driller's log of Stickle Drilling Company, et al, Ryerson #1, C, NW SE, Section 35-183-21W, Ness County, Kansas.

RECEIVED
STATE CORPORATION COMMISSION

JUN 28 1965

Frank E. Stickle
Frank E. Stickle

William T. Bonham
Notary Public

CONSERVATION DIVISION
Wichita, Kansas

February 13, 1960
My Commission Expires