


15-127-19038-0000
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Morris County, Sec. 35 Twp. 16 Rge. 5 (E) E (W)

Location as "NE/CNWxSWx" or footage from lines NW NE SE
Lease Owner Rosen-Schreiner
Lease Name Grass Well No. 7
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 4-27-63 _____ 19____
Plugging completed 4-30-63 _____ 19____
Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

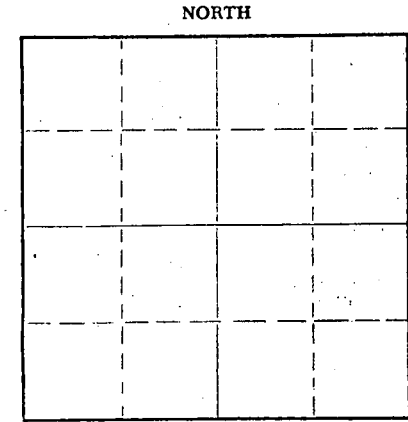

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Cecil Jones
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2212 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	145'	None
				5-1/2"	2197'	1903'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 2212', sanded to 2190' and dumped 5 sacks of cement @ 2190' with dump ~~ba~~ bailer. Pulled 5 1/2" casing, set rock bridge from 145' to 135' and ran 20 sacks of cement @ 135'. Mudded to 30', set rock bridge to 25' and ran 8 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

PLUGGING COMPLETE.

MAY 23 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Knight Casing Pulling Company
Address Chase, Kansas

STATE OF Kansas COUNTY OF Rice, ss.
Noel J. Knight (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of May, 1963

My commission expires May 20, 1964

Milton J. Volin
Notary Public.



STENCILED

ORIGINAL

JUN 29 1963

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock,
Wichita, Kansas


15-127-19038-000 R

Company- GRASSLAND OIL
Farm- Grass No. 7

SEC. 35 T. 16 R. 5E
NW NE SE

Total Depth. 2233'
Comm. 5-16-55 Comp. 5-26-55
Shot or Treated.
Contractor. Slusser Drig.
Issued. 6-29-63

County Morris
KANSAS



CASING:
8" 130'
5" 2192'

Elevation. 1449'

Production. 30 BOPD & 100 BW

Figures Indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE:

TOPS:
Mississippi 2190
Total Depth 2233

RECEIVED
STATE CORPORATION COMMISSION
APR 23 1971
CONSERVATION DIVISION
Wichita, Kansas