


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

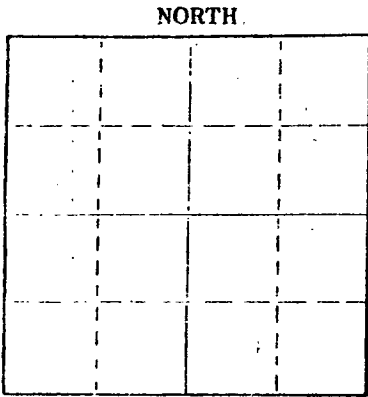

Locate well correctly on above Section Plat

MARION County. Sec. 29 Twp. 17 Rge. 4 (E) E (W)

Location as "NE/CNW/SE/SW" or footage from lines SLUSSER DRILLING COMPANY

Lease Owner SLUSSER DRILLING COMPANY

Lease Name DEINES Well No. 4

Office Address BOX 275 MARION, KS 66861

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed June 26 19 70

Application for plugging filed July 28 19 76

Application for plugging approved July 29 19 76

Plugging commenced July 27 19 76

Plugging completed July 30 19 76

Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Hugh E. Scott

Producing formation Depth to top Bottom Total Depth of Well 2455 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	153	none
				5 1/2	2395	1680

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Move in, rig up and dig out cellar. Filled to 2390' and added 5 sacks of cement to plug bottom. Set 15' rock bridge at 180' and added 25 sacks of cement. Set a 10' bridge at 40' and added 10 sacks of cement to plug to surface.

RECEIVED
STATE CORPORATION COMMISSION

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor THE BUCKEYE CORPORATION

Address BOX 1020 EL DORADO, KS 67042 CONSERVATION DIVISION

STATE OF KANSAS COUNTY OF BUTLER
CHARLES V. CROSS (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

BOX 1020 EL DORADO, KS 67042 (Address)

SUBSCRIBED AND SWORN TO before me this 4th day of AUGUST, 19 76



My commission expires

[Signature]

Notary Public.

DRILLERS LOG

Company	Slusser Drilling Co.	Commenced 6/9/70
Contractor	Slusser Drilling Co,	Completed 6/26/70
Farm	Deines #4	SW SW NE 29-17-4
8 5/8	@ 153	Marion County, Kansas
5 1/2	@ 2395	

Surface Soil	5
Shale & Shells	100
Lime & Shale	715
Shale & Shells	1080
Shale & Lime	1275
Lime & Shale	1465
Shale & Lime	1685
Lime & Shale	1830
Lime	2210
Lime & Shale	2393
Chat	2395 Rotary T.D.

2395-2405	Chat firm
2405-2411	Chat, good show of gas, wlight show of oil
2411-2418	Chat soft and white, good show of oil, increase in gas
2418-2422	Chat hard, little water
2422-2427	Chat
2427-2433	Chat blue, increase in oil
2433-2440	Chat hard
2440-2445	Chat soft, increase in gas and oil
2445-2453	Chat hard
2453-2455	Lime, Cable Tool Y. D.

RECEIVED
STATE CORPORATION COMMISSION

JUL 29 1976

CONSERVATION DIVISION
Wichita, Kansas