

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Harper County, Sec. 14 Twp. 33 Rge. 9 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SE SW

Lease Owner Kimbark Exploration Company

Lease Name Enderud Well No. 1

Office Address Plainville, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 10-5-66 19

Plugging completed 10-8-66 19

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

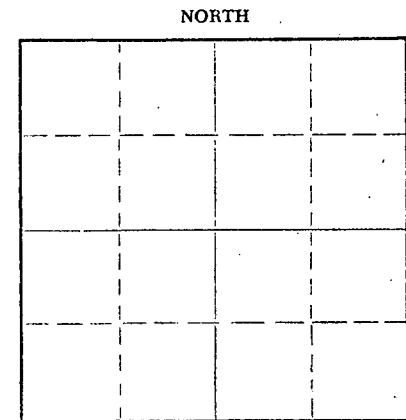

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie Elving

Producing formation Depth to top Bottom Total Depth of Well 4500 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8-5/8" | 241' | None |
| | | | | 5-1/2" | 4480' | 3822' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 4500', sanded to 4450' and dumped 5 sacks of cement @ 4450' with dump bailer. Pulled 5 1/2" casing, mudded hole to 240', set rock bridge to 230' and dumped 25 sacks of cement. Mudded hole to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
NOV 14 1966
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.

Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight

Chase, Kansas


(Address)

SUBSCRIBED AND SWORN TO before me this 13th day of October, 1966

Milton J. Volin

Notary Public.

My commission expires May 20, 1968



DRILLER'S LOG

COMPANY:
CONTRACTOR:
FARM:
LOCATION:

COMMENCED:
COMPLETED:

Kimbark Exploration
LEBEN DRILLING, INC.
ENDERUD #1
C SE SW SEC. 14-33S-9W
HARPER COUNTY, KANSAS
8-2-66
8-10-66

| | | |
|------|-------------|--------------------------|
| 0 | 242 | Red Rock |
| 242 | 1030 | Redbed, Shale |
| 1030 | 1390 | Shale, Shells |
| 1390 | 1475 | Anhydrite |
| 1475 | 1588 | Lime, Shale |
| 1588 | 1800 | Shale, Lime |
| 1800 | 2367 | Lime, Shale |
| 2367 | 2817 | Shale, Lime |
| 2817 | 2995 | Lime, Shale |
| 2995 | 3360 | Lime |
| 3360 | 3456 | Lime, Shale |
| 3456 | 3640 | Shale, Sand |
| 3640 | 3885 | Sand, Shale |
| 3885 | 4335 | Lime |
| 4335 | 4425 | Lime, Shale |
| 4425 | 4480 | Shale, Lime |
| | <u>4480</u> | <u>RTD-5 1/2" Casing</u> |

RECEIVED
STATE CORPORATION COMMISSION
OCT 10 1966
CONSERVATION DIVISION
Wichita, Kansas

Set 8 5/8" new 24# surface casing set @ 242' with 150 sacks Common 2% cc

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Enderud #1 well, located C SE SW of Section 14, Township 33 South, Range 9 West, Harper County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite
Leslie Kite

STATE OF KANSAS)
) SS
COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 15th day of August, 1966.

Ulanda Nichols
Ulanda Nichols

My Commission Expires:
April 1, 1967