


15-007-01574-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

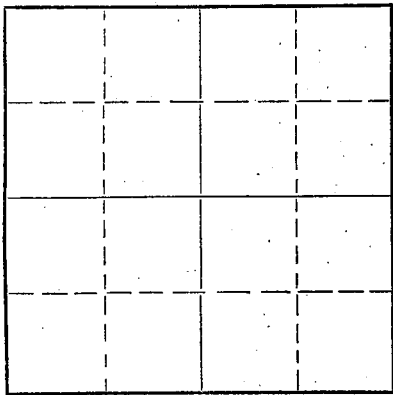

Locate well correctly on above
Section Plat

BARBER

County. Sec. 20 Twp. 31S Rge. (E) 14 (W)

Location as "NE/CNW/SW" or footage from lines. C NW 1/4 SW 1/4 SE 1/4

Lease Owner THE OIL CAPITOL CORPORATION

Lease Name SKINNER Well No. B-1

Office Address 1218 First Nat'l Bldg., Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed October 15th 19 56

Application for plugging filed March 15th 19 57

Application for plugging approved March 20th 19 57

Plugging commenced April 5th 19 57

Plugging completed April 11th 19 57

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well M. A. Rives

Producing formation NONE Depth to top Bottom Total Depth of Well 4640 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lansing Section	Dry	3927	4446			
Viola Section	Dry	4479	4530			
Simpson Section	Dry	4632	4640	5 1/2	4640	3915

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 4400 feet to 300 feet for each plug set.

Set Lane Wells plug at 4400', then dumped 2 sacks cement with bailer on top of plug. Pulled pipe up to 1800' and pumped in 40 sacks of mud using Globe Cementing Company. Pulled rest of pipe and set 10 foot rock bridge at 300 feet. Put 20 sacks of cement mud on up to 30' then put 10 sacks of cement on top.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Arnett Casing Pulling Company

Address 172 West Thrid, Hoisington, Kansas

STATE OF OKLAHOMA, COUNTY OF TULSA, ss.

GEORGE P. TAYLOR (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) George P. Taylor Prod. Supt.

The Oil Capitol Corp. 1218 First Nat'l Bldg. (Address) Tulsa, Okla.

SUBSCRIBED AND SWORN to before me this 2nd day of May, 1957

19

My commission expires 7/1/59

RECEIVED

Notary Public.

24-7368-5

3-59

STATE CORPORATION COMMISSION

PLUGGING
FILE SEC 20 T 31 R 14 W
BOOK PAGE 149 LINE 14

MAY 6 - 1957
5-6-57
CONSERVATION DIVISION
Wichita, Kansas