

15-007-00736-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Barber County, Sec. 35 Twp. 31 Rge. (E) 14 (W)

Location as "NE/CNW%SW%" or footage from lines NE SW NW

Lease Owner Jones, Shelburne & Farmer, Inc.

Lease Name STONE B Well No. 1

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry

Date well completed 10-11 19 56

Application for plugging filed 10-11 19 56

Application for plugging approved 10-11 19 56


Plugging commenced 10-11 19 56

Plugging completed 10-11 19 56

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

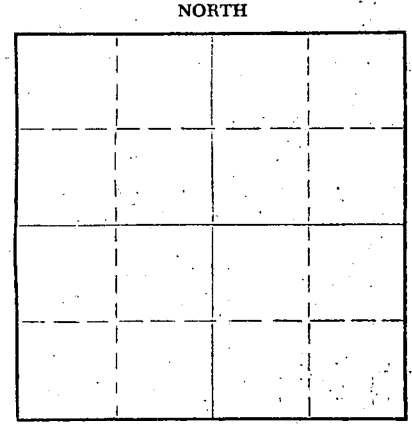

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well M. A. Rives

Producing formation Depth to top Bottom Total Depth of Well 4772 Feet.

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	265	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- Filled hole with heavy mud to 250
- Pushed plug to 250
- Pulled drill pipe
- Dumped in 1/2 sack hulls
- Ran drill pipe back in and cemented through drill pipe
- Cemented with 20 sacks on bottom - 10 sacks on top
- Filled hole with mud and then pushed plug to 50 feet
- Dumped in 1/2 sack hulls
- Dumped in 10 sacks through drill pipe to fill hole to top  
(Cemented by Globe Cementing Company)  
(If additional description is necessary, use BACK of this sheet)

RECEIVED  
STATE CORPORATION  
OCT 24 1958  
10-24-56  
CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor Jones, Shelburne & Farmer, Inc.  
Address Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.  
JOHN O. FARMER (employer or owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John O. Farmer  
Russell, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of October, 19 56

Lucille Kennedy Notary Public.

My commission expires October 11-1958

PLUGGING  
FILE SEC. 35 T. 31 R. 14 W  
BOOK PAGE 107 LINE 12

ADDRESS Russell, Kansas

Give detailed description and thickness of all formations drilled through, contents of sand, whether dry water, oil or gas.

640 Acres  
N

COUNTY Barber SEC 35 TWP 31 RGE 14

COMPANY OPERATING Jones, Shelburne & Farmer, Inc.

OFFICE ADDRESS Russell, Kansas

FARM NAME STONE B WELL NO 1

DRILLING STARTED 9-15-56 DRILLING FINISHED 10-11-56


DATE OF FIRST PRODUCTION \_\_\_\_\_ COMPLETED \_\_\_\_\_

WELL LOCATED NE 1/4 SW 1/4 NW 1/4 North of South

Line and \_\_\_\_\_ ft East of West Line of Quarter Section

Elevation (Relative to sea level) DERRICK FLOOR 1669 GROUND 1666

CHARACTER OF WELL (Oil gas or dryhole) Dry



Locate well correctly

OIL OR GAS SANDS OR ZONES

Name	From	To	Name	From	To

Perforating Record If Any

Shot Record

Formation	From	To	No. of Shots	Formation	From	To	Size of Shot

CASING RECORD

Amount Set							Amount Pulled			Packer Record	
Size	Wt.	Thds	Make	ft	in	in	Size	Length	Depth Set	Make	
8-5/8				265							

Liner Record: Amount \_\_\_\_\_ Kind \_\_\_\_\_ Top \_\_\_\_\_ Bottom \_\_\_\_\_

CEMENTING AND MUDDING

Size	Amount Set		Sacks Cement	Chemical		Method of Cementing	Amount	Mudding Method	Results (See Note)
	ft	in		Gal	Make				
8-5/8	265		150						

Note: What method was used to protect sands if outer strings were pulled?

NOTE: Were bottom hole plugs used? If so, state kind, depth set and results obtained.

TOOLS USED

Rotary Tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet. Cable tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet.

Type Rig \_\_\_\_\_

INITIAL PRODUCTION TEST

Describe initial test: whether by flow through tubing or casing or by pumping \_\_\_\_\_

Amount of Oil Production \_\_\_\_\_ bbls. Size of choke, if any \_\_\_\_\_ Length of test \_\_\_\_\_ Water

Production \_\_\_\_\_ bbls. Gravity of oil \_\_\_\_\_ Type of Pump, if pump is used, describe \_\_\_\_\_

Formation	Top	Bottom	Formation	Top	Bottom
RedBed	0	265			
RedBed & brown shale	265	635			
Shale & shells	635	1495			
Anhydrite	1495	1540			
Shale	1540	1550			
Shale & salt	1550	1730			
Shale & lime	1730	1900			
Lime	1900	1980	Elevation RB		1671
Lime & shale	1980	2440	Anhydrite		1495
Shale & lime strks	2440	2470	Heebner		3688
Shale & lime	2470	3270	Toronto		3697
Lime & shale	3270	3710	Douglas		3718
Shale & sandy lime	3710	3795	Douglas sand		3822
Shale & lime	3795	3865	Lansing		3853
Lime & shale	3865	4045	Marmaton		4269
Lime	4045	4240	Mississippi		4352
Lime & shale	4240	4360	Kinderhook		4454
Mississippi	4360	4454	Chat		4489
Kinderhook	4454	4475	Maquoketa		4495
Shale & lime	4475	4515	Viola		4514
Lime & shale	4515	4555	Simpson		4625
Viola	4555	4575	Arbuckle		4722
Lime & shale	4575	4615	T.D.		4772
Viola - cherty	4615	4635	D & A		
Shale & lime	4635	4730			
Arbuckle	4730	4772			
T.D.		4772			
D & A					

**PLUGGING**  
FILE SEC 35 T 31 R 14W  
BOOK PAGE 107 LINE 12

If the undersigned, being first duly sworn upon oath, state that this well record is true, correct and complete according to the records of this office and to the best of my knowledge and belief.

*John D. Farmer* Vice Pres.  
Name and title of representative of company

Subscribed and sworn to before me this 11th day of October 1956

My Commission expires 10-11-58  
*Quincy R. ...* Notary Public

15-007-00236-0000  
WELL NO. 1 COUNTY Barber  
SEC. 35 TWP. 31 RGE. 14  
FARM NAME STONE B