

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Harper

County, Sec. 32 Twp. 34S Rge. (E) 5 (W)

Location as "NE/CNW/SW" or footage from lines SW SW SE

Lease Owner Quintin Little

Lease Name Jess Well No. 1

Office Address Box 1509, Ardmore, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed March 28 1970

Application for plugging filed " 19

Application for plugging approved " 19

Plugging commenced " 19

Plugging completed March 29 1970

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein

Producing formation Depth to top Bottom Total Depth of Well 5250 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	259'	-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud up to 259', set plug and 1/2 sack hulls and 30 sacks cement; mud up to 40', set plug and 1/2 sack hulls and 8 sacks cement. 2 sacks in rat hole.

RECEIVED
STATE CORPORATION COMMISSION
APR 7 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Graves Drilling Company, Inc.
Address 505 Union Center, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.


John C. Graves (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John C. Graves
505 Union Center, Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of April, 1970



Mary Ann Scott
Notary Public.

ROTARY DRILLERS' LOG

OPERATOR: Quintin Little DRILLING COMMENCED: 3/14/70
 Box 1509
 Ardmore, Oklahoma

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: 3/28/70
 505 Union Center
 Wichita, Kansas


CASING RECORD: 8 5/8" surface casing, set @ 259', with 200 sacks of cement LOCATION: Jess #1
 SW SW SE Sec. 32-34S-5W
 Harper County, Kansas

0	-	605	Red bed & shale
605	-	1191	Lime & shale
1191	-	1460	Sandy lime & shale
1460	-	3617	Lime & shale
3617	-	3820	Sand & shale
3820	-	4333	Lime & shale
4333	-	4440	Lime
4440	-	4696	Lime & shale
4696	-	4742	Lime & chert
4742	-	4880	Miss. lime
4880	-	4931	Lime & shale
4931	-	4939	Shale
4939	-	4949	Lime - cherty
4949	-	4968	Shale
4968	-	4976	Lime & shale
4976	-	5072	Lime
5072	-	5100	Lime & chert
5100	-	5146	Lime
5146	-	5162	Kinderhook
5162	-	5164	Shale & lime
5164	-	5230	Shale
5230	-	5236	Lime
5236	-	5250	Sand (Simpson)
5250			Total Depth

RECEIVED
 STATE CORPORATION COMMISSION
 APR 7 1970
 CONSERVATION DIVISION
 Wichita, Kansas

I hereby certify that the foregoing statements are true and correct, to the best of my knowledge.

GRAVES DRILLING COMPANY, INC.

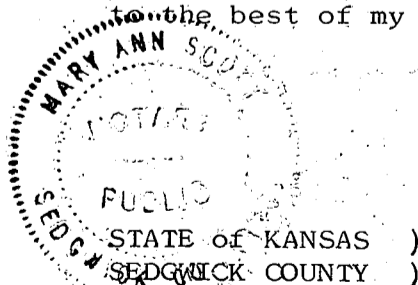

John Graves

Subscribed and sworn to before me, a Notary Public, on this 1st day of April, 1970.
 My commission expires: July 28, 1970

Mary Ann Scott
 Mary Ann Scott, Notary Public