


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Barber County. Sec. 35 Twp. 32S Rge. 13 (E) (W)

Location as "NE/CNW/SW" or footage from lines C NW NW
Lease Owner Bowers Drilling Company
Lease Name Benning Well No. B #1
Office Address 1434 Wichita Plaza Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed 2-3 19 64
Application for plugging filed September 19 69
Application for plugging approved September 19 69
Plugging commenced October 22 19 69
Plugging completed October 28 19 69
Reason for abandonment of well or producing formation No longer producing

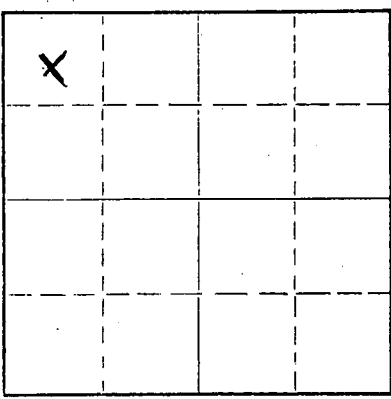

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production July 19 69

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ralph Warren
Producing formation Elgin Depth to top Bottom Total Depth of Well 4615 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	313	None
				5 1/2	4003	3119

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

October 22, 1969 Dumped sand to 3300'. Mixed and dumped 5 sx of cement to 3250'.

October 28, 1969 Set 10' rock bridge from 260' to 250'. Filled 8 5/8 casing with 3000# test ready mix cement, from 250' to base of cellar.

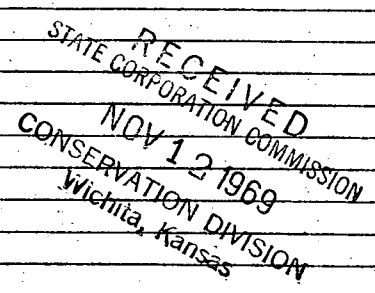

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor RUSS CASING PULLING, INC.
Address P. O. Box 1082 Great Bend, Kansas 67530


STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Emil E. Bowers (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Emil E. Bowers
1434 Wichita Plaza Building (Address)

SUBSCRIBED AND SWORN to before me this 10th day of November, 19 69

My commission expires May 12, 1973

Carole P. Young Notary Public.



WELL LOG

COMPANY: Bowers Drilling Company, Inc. and National Cooperative Refinery Assn.
CONTRACTOR: Bowers Drilling Company, Inc.
FARM: Binning "B" #1
LOCATION: C NW NW Section 35-32S-13W Barber County, Kansas
COMMENCED: 1-20-64
COMPLETED: 2-3-64
ELEVATION: 1688 K. B.

0 - 1529	Redbed and shale	Set 313' 8-5/8" casing with 225 sacks
1529 - 1534	Anhydrite	
1534 - 1735	Lime and shale	
1735 - 1855	Shale and Shells	
1855 - 3555	Lime and shale	
3555 - 3598	Shale-Lime-Sand	
3598 - 3619	Elgin Sand	
3619 - 3687	Sand	
3687 - 3834	Lime-Shale-Chalk	
3834 - 3860	Shale-Lime	
3860 - 3900	Shale and Sandy Shale	
3900 - 3920	Douglas sand	
3920 - 3963	Lime	
3963 - 4019	Lime and Shale Breaks	
4019 - 4110	Lime	
4110 - 4164	Lime and shale breaks	
4164 - 4225	Lime	
4225 - 4267	Lime and shale	
4267 - 4307	Lime	
4307 - 4367	Lime and Shale	
4367 - 4441	Lime XXXXXXXX	
4441 - 4485	Lime-Shale	
4485 - 4615	Lime	Ran 125 fts. 5 1/2" set at 4003' with 150 sacks
4615	T. D.	

RECEIVED
STATE CORPORATION COMMISSION
SEP 3 1969
CONSERVATION DIVISION
Wichita, Kansas

LOG TOPS:

Elgin Zone	3564	Lansing	3944
Elgin Sand	3584	Base/KansasCity	4308
Heebner	3771	Errosomal Mississippian	4454
Upper Douglas Sd	3840	Mississippian	4468
Lower Douglas Sd	3906		

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

I, Emil E. Bowers, do hereby certify that the above and foregoing is a true and correct copy of the copy of the log of the Binning "B" #1 located C NW NW Section 35-32S-13W, Barber County, Kansas, as reflected by the files of Bowers Drilling Company, Inc.

Emil E. Bowers

Subscribed and sworn to before me, a Notary Public in and for Sedgwick County, Kansas, this 10th day of February, 1964.

Donna F. Miller
Donna F. Miller, Notary Public

My commission expires May 1, 1966.