

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
11 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Barber County, Sec. 36 Twp. 32S Rge. 13 (EX) (W)

Location as "NE/CNW/SW" or footage from lines C SW 1/4 NE 1/4

Lease Owner Bowers Drilling Co., Inc. & National Cooperative Refinery

Lease Name Lonker Well No. D #2

Office Address 416 Union Center, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed May 15 19 63

Application for plugging filed May 15 19 63

Application for plugging approved May 15 19 63


Plugging commenced May 16 19 63

Plugging completed May 16 19 63

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes, verbally

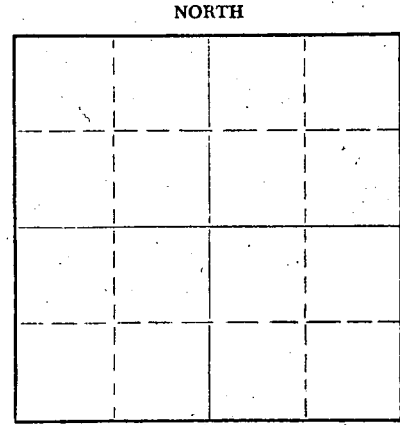

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well

Producing formation Depth to top Bottom Total Depth of Well 4565 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	318	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with heavy mud to 180'  
Set first plug at 180' with 1/4 sacks hulls and 20 sacks cement  
Filled with heavy mud to 40'  
Set second plug at 40' with 1/4 sacks hulls and 10 sacks cement in rathole

RECEIVED  
STATE CORPORATION COMMISSION

MAY 27 1963

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Bowers Drilling Company, Inc.  
Address 416 Union Center Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.


(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Emile E. Bowers*  
416 Union Center, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of May, 19 63

My commission expires May 1, 1966

*Henna J. Miller*  
Notary Public.



WELL LOG

COMPANY: Bowers Drilling Company, Inc. and National Cooperative Refinery Assn.  
 CONTRACTOR: Bowers Drilling Company, Inc.  
 FARM: Lonker D #2  
 LOCATION: C SW/4 NE/4 Section 36-32S-13W Barber County, Kansas  
 COMMENCED: 5-2-63  
 COMPLETED: 2-16-63  
 ELEVATION: 1659 K. B.

0 - 1756 Shale and Redbed  
 1756 - 3952 Lime and Shale  
 3952 - 3984 Lime  
 3984 - 4431 Lime and Shale  
 4431 - 4482 Lime  
 4482 - 4565 Lime and Shale

LOG TOPS:

Heebner	3747	Base Kansas City	4312
Douglas Sand	3851	Mississippi	4462
Lansing	3937		

STATE OF KANSAS            )  
   ) SS  
 COUNTY OF SEDGWICK    )

I, Emil E. Bowers, do hereby certify that the above and foregoing is a true and correct copy of the copy of the log of the Lonker D #2, C SW/4 NE/4 Section 36-32S-13W, Barber County, Kansas, as reflected by the files of Bowers Drilling Company, Inc.

*Emil E. Bowers*  
 Emil E. Bowers

Subscribed and sworn to before me, a Notary Public in and for Sedgwick County, Kansas this 23rd day of May, 1963.

*Donna F. Miller*  
 Donna F. Miller, Notary Public

My commission expires May 1, 1966.

**RECEIVED**  
 STATE CORPORATION COMMISSION  
 MAY 27 1963  
 CONSERVATION DIVISION  
 Wichita, Kansas