

15-135-21173-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Ness County, Sec. 23 Twp. 19S Rge. (E) 22 (W)

Location as "NE/CNW&SW&" or footage from lines 150' C/NW NW

Lease Owner Twin Western Resources, Inc.

Lease Name Henry Well No. 1

Office Address Suite 920 Union Center, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed April 1 19 76

Application for plugging filed April 1 19 76

Application for plugging approved April 1 19 76


Plugging commenced April 1 19 76

Plugging completed April 1 19 76

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

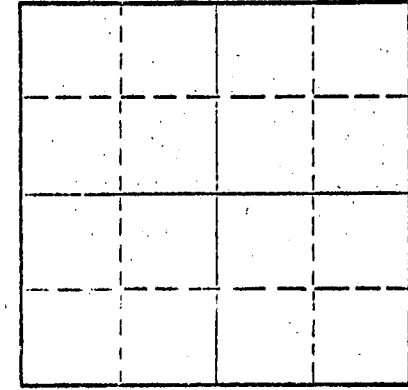

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Kansas

Producing formation Depth to top Bottom Total Depth of Well 4359 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"	0	294'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole plugged as follows: Plugged at 550' with 70 sacks of 50-50 pozmix and 2% gel; plugged at 240' with 20 sacks of 50-50 pozmix and 2% gel; Bridge and plug at 40' with 10 sacks of 50-50 pozmix and 2% gel. Plug down at 7:15 P. M. April 1, 1976.

RECEIVED
STATE CORPORATION COMMISSION

MAY 23 1976
5-23-76

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Strata Drilling Company

Address P. O. Box 355, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.

Kenneth J. Link (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Kenneth J. Link, President
P. O. Box 355, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of April, 1976

My commission expires December 14, 1977

Elaine H. Taylor
Notary Public.

DRILLERS LOG

15-135-21173-0000

#1 Henry

CASING RECORD:
288' of used 8-5/8"
surface casing.

COMPANY: Twin Western Resources, Inc.

DESCRIPTION: ^{150'w} C/NW NW
Section 23-19S-22W
Ness County, Kansas

TOTAL DEPTH:
4359'

COMMENCED: March 24, 1976

COMPLETED: April 1, 1976

D. & A.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Post Rock & Shale	0	314	Ran 288' of used 8-5/8" surface casing; set and cemented at 294' with 185 sacks of common cement, 2% gel and 3% C. C. Plug down at 11:30 P. M. March 24, 1976.
Shale & Sand	314	745	
Shale & Sand	745	1480	
Shale, Lime & Shells	1480	1970	
Shale & Lime	1970	2515	
Lime	2515	2700	
Lime & Shale	2700	4145	
Lime	4145	4240	
Lime & Shale	4240	4330	
Lime	4330	4350	
Lime	4350	4359	

ROTARY TOTAL DEPTH: 4359'

Ran two Drill Stem Tests.

No electric log was run.

RECEIVED
STATE CORPORATION COMMISSION
MAY 23 1976
CONSERVATION DIVISION
Wichita, Kansas

D. & A.

Hole plugged as follows: Plugged at 550' with 70 sacks of 50-50 pozmix and 2% gel; plugged at 240' with 20 sacks of 50-50 pozmix and 2% gel; bridge and plug at 40' with 10 sacks of 50-50 pozmix and 2% gel. Plug down at 7:15 P. M. April 1, 1976.

STATE OF KANSAS)
) ss.
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING COMPANY

Kenneth J. Link
Kenneth J. Link, President

Subscribed and sworn to before me this 5th day of April, 1976.

My Commission Expires:
December 14, 1977
ELAINE H. TAYLOR
NOTARY PUBLIC
BARTON COUNTY, KANSAS

Elaine H. Taylor
Elaine H. Taylor, Notary Public