


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

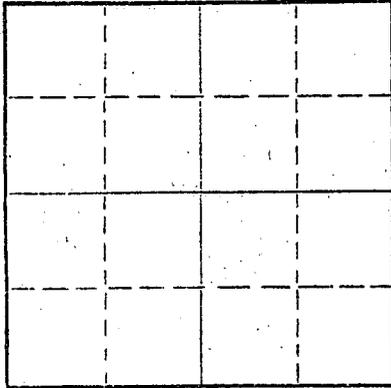

Locate well correctly on above
Section Plat

Ness County, Sec. 19 Twp. 19 Rge. 22 (E) (W)
Location as "NE/CNW/SW" or footage from lines C SW NE
Lease Owner Fender Pipe & Supply
Lease Name Westermeyer #2 Well No.
Office Address Russell, Kansas 67665
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 4/25/72 19
Plugging completed 6/1/72 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation Depth to top Bottom Total Depth of Well 4368 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	346	none
				5 1/2"	4362	2815'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 4368', ran sand to 4350' and dumped 5 sacks of cement. Shot pipe at 3500', 2900', 2814', pulled 89 joints. Pumped 100 sacks of cement, 24 sacks gel and 3 sacks hulls.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
6-9-72
JUN 9 1972

CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet.)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Noel J. Knight*
CHASE KANSAS

SUBSCRIBED AND SWORN to before me this 5th day of June 19 72

(Address) *Margaret Melcher*
Notary Public.

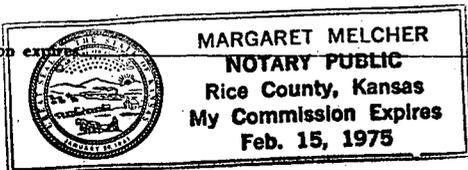

15735-20553-0000

DRILLERS LOG

WESTERMEYER NO. 2

CASING RECORD:	OPERATOR: Circle Oil & United Petroleum	DESCRIPTION:
8-5/8" @ 340' w/200 sax cement	CONTRACTOR: Sage Drilling Co.	C SW NE Sec. 19-19S-22W Ness County, Kans.
TOTAL DEPTH: 4368'	COMMENCED: January 31, 1972	ELEVATION: 2235KB
	COMPLETED: February 10, 1972	


<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay & Rock	0	175	
Shale	175	850	
Shale & Sand	850	1502	
Anhydrite	1502	1541	
Shale & Shells	1541	1920	
Shale & Lime	1920	2290	
Lime & Shale	2290	3820	
Lime	3820	4350	
Lime & Shale	4350	4365	
Lime	4365	4368	5 1/2" @ 4362' w/100 sax

RECEIVED
STATE CORPORATION COMMISSION
APR 13 1972
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING CO., INC.

By Clarence Michael
Clarence Michael



Subscribed and sworn to before me this 11th day of February, 1972.

Louise K. Whitted
Louise K. Whitted - Notary Public

My commission expires:
November 26, 1974.