

15135-21179-0000

FORM CP-4

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Ness County, Sec. 15 Twp. 19S Rge. 22 (W)

Location as "NE/CNW/SE" or footage from lines SE SE

Lease Owner Cities Service Oil Company

Lease Name Schwindt "A" Well No. 1

Office Address 700 Sutton Place Bldg. Wichita, KS 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed April 4 1976

Application for plugging filed (verbally) April 4 1976

Application for plugging approved (verbally) April 4 1976


Plugging commenced April 4 1976

Plugging completed April 4 1976

Reason for abandonment of well or producing formation No commercial quantity of oil or gas encountered.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

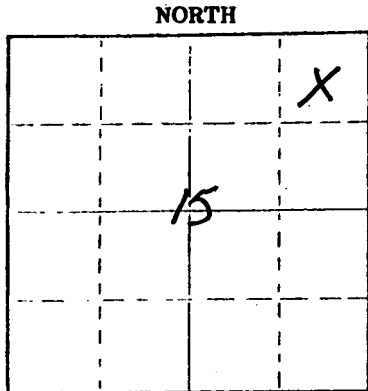

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well \_\_\_\_\_

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4423'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
RECEIVED STATE CORPORATION COMMISSION 4-8-76 APR 08 1976				8 5/8"	548'	None
CONSERVATION DIVISION Wichita, Kansas						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1st Plug set @ 500' with 50 sacks  
2nd Plug set @ 40' with 10 sacks  
Rat hole 10 sacks  
Plug was down @ 8:30 a.m. April 4, 1976.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.  
Address 801 Union Center, Wichita, KS 67202

STATE OF KANSAS COUNTY OF SEDGWICK ss.  
Jerry A. Langrehr-Exec. V. P. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Jerry A. Langrehr  
801 Union Center, Wichita, KS 67202

(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of April, 1976

My commission expires February 18, 1980

Diane Steincamp  
Diane Steincamp Notary Public.



CONTRACTOR'S WELL LOG

15-135-21179-0000

OPERATOR: Cities Service Oil Company  
 CONTRACTOR: Abercrombie Drilling, Inc.  
 WELL NAME: SCHWINDT #1  
 LOCATION: ~~C-SE~~ Section 15-19S-22W  
 Ness County, Kansas  
 SPUD DATE: March 25, 1976  
 COMPLETION DATE: April 4, 1976

0	548	Sand
548	1402	Sand & clay
1402	1744	Sand & Shale
1745	2560	Shale
2560	3765	Shale & Lime
3765	4015	Lime & Shale
4015	4130	Shale & Lime
4130	4325	Lime & Shale
4325	4345	Shale
4345	4363	Lime & Shale
4363	4423	Lime
	4423	Rotary Total Depth

Cut 549' of 12 1/4" hole. Ran 13 jts. new 8 5/8" 24# casing. Three centralizers. Tallied 537, Set 548'. Cemented with 300 sx. 50/50 Posmix 2% ca. cl. Cement circ. Plug was down @ 3:30 a.m. March 25, 1976.

Plugged and Abandoned: 1st Plug was set @ 500' with 50 sx. cement. 2nd Plug was set @ 40' with 10 sx. cement. Rat hole 10 sx. cement. Plug was down @ 8:30 a.m. April 4, 1976.

STATE OF KANSAS )  
 ) SS  
 COUNTY OF SEDGWICK )

Jerry A. Langrehr-Exec. Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the Schwindt #1, NE NE Section 15-19S-22W Ness County, Kansas.


ABERCROMBIE DRILLING, INC.

By: Jerry A. Langrehr  
 Jerry A. Langrehr- Exec. V.P.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 6th day of April, 1976.

Diane Steinamp  
 Diane Steinamp - Notary Public

My Commission Expires: February 18, 1980



RECEIVED  
 STATE COMMISSION COMMISSION

APR 08 1976

CONSERVATION DIVISION  
 Wichita, Kansas