


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

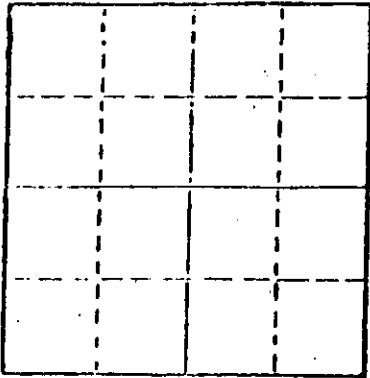

Locate well correctly on above
Section Plat

Ness County. Sec. 12 Twp. 19S Rge. 22 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
200' East of the NW/4 NW/4
Lease Owner Martin Oil Producers, Inc.
Lease Name Foos Well No. 1
Office Address 1010 Union Center, Wichita, KS 67202
Character of Well (Completed as Oil, Gas or Dry Hole) dry hole
Date Well completed 1/10 1983
Application for plugging filed 1/10 1983
Application for plugging approved 1/10 1983
Plugging commenced 1/10 1983
Plugging completed 1/10 1983
Reason for abandonment of well or producing formation
No commercial quantity of oil or gas encountered.
If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Steve Durant
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Total Depth 4317 feet. Set first plug at 930 feet with 60 sacks of
50/50 poz mix cement, 4% Gel and 3% Calcium Chloride; set second plug
at 530 feet with 40 sacks; 10 sacks and a bridge set at 40 feet and
10 sacks in the rathole. Job completed at 10:00 p.m. on
January 10, 1983.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Kaw Drilling Co., Inc.

STATE OF KANSAS COUNTY OF SEDGWICK, ss. K. S. Martin, President of Kaw Drilling Co., Inc. (employee of owner) or (owner or operator) contractor



of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) K. S. Martin
K. S. Martin, President 1010 Union Center
(Address) Wichita, KS 67202

SUBSCRIBED AND SWORN TO before me this 24th day of January, 1983.

Mary Susan Whaley
Mary Susan Whaley Notary Public

My commission expires December 10, 1983

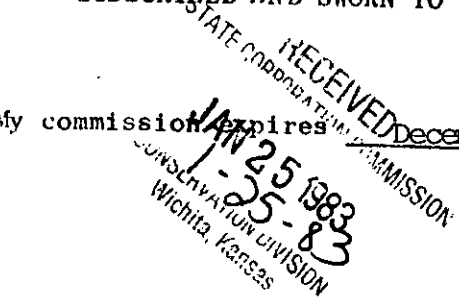

15-135-22338-0000

OPERATOR: Martin Oil Producers, Inc.
 CONTRACTOR: Kaw Drilling Co., Inc.
 WELL NAME: #1 Foos
 LOCATION: 200' E of NW NW Sec. 12-19S-22W
 Ness County, Kansas
 SPUD DATE: December 31, 1982
 COMPLETION DATE: January 10, 1983


131	1300	Shale
2210	2247	Shale and Shell
2247	2410	Shale
2570	2800	Shale and Shell
3138	3355	Shale and Shell
3505	3722	Shale and Lime
3860	3988	Lime
4215	4295	Lime and Shale
	4317	R.T.D.

Spud hole at 12:30 p.m. on December 31, 1982. Drilled 539 feet of 12 1/4 inch hole. Ran 524 feet of 8 5/8 inch casing. Set at 536 feet with 275 sacks of common cement, 3% Calcium Chloride and 2% Gel. Plug down at 11:30 p.m. on December 31, 1982.

Total Depth 4317 feet. Set first plug at 930 feet with 60 sacks of 50/50 poz mix cement, 4% Gel and 3% Calcium Chloride; set second plug at 530 feet with 40 sacks; 10 sacks and a bridge at 40 feet and 10 sacks in the rathole. Job completed at 10:00 p.m. on January 10, 1983. State Plugger - Steve Durant.

STATE OF KANSAS)
) ss
 COUNTY OF SEDGWICK)


I, K. S. Martin, President of Kaw Drilling Co., Inc., being first duly sworn and upon my oath, state that: I have knowledge of the facts, statements and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.



 K. S. Martin, President

SUBSCRIBED AND SWORN to before me on this 24th day of January, 1983.

My Commission Expires:
 December 10, 1983

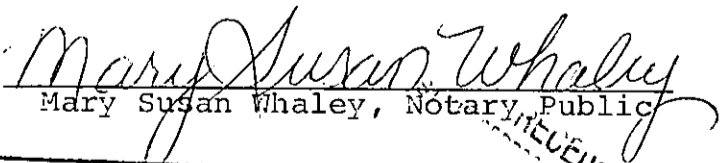

 Mary Susan Whaley, Notary Public

