

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R. -82-3-117

API NUMBER 15-135-23,284-0000

LEASE NAME Kleweno

WELL NUMBER 1

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

4290' Ft. from S Section Line

4950' Ft. from E Section Line

LEASE OPERATOR Ranken Energy Corporation

SEC. 11 TWP. 19S RGE. 22 (E/W)(W)

ADDRESS 3206 Teakwood Lane, Edmond, OK 73013

COUNTY Ness

PHONE# (405)-340-2363 OPERATORS LICENSE NO. RECEIVED

Date Well Completed 10/19/88

Character of Well D&A

Plugging Commenced 10/19/88

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Plugging Completed 10/20/88

The plugging proposal was approved on 10/19/88

(date)

by Richard Lacey

(KCC District Agent's Name).

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation _____ Depth to Top _____ Bottom T.D. 4360'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
				8-5/8"	701'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet each set.

Mud laden fluid 4360'-1500' 15 sks cement in rathole
50 sks cement @ 1500'
50 sks cement @ 730'
10 sks cement @ 40'

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. 750

Address P. O. Box 506, Russell, Kansas 67665-0506

STATE OF KANSAS COUNTY OF RUSSELL, ss.

Kyle B. Branum

(Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.


(Signature) Kyle B. Branum

(Address) P.O. Box 506, Russell, KS 67665-0506

SUBSCRIBED AND SWORN TO before me this 24th day of October, 19 88

Glenda R. Tiffin
Glenda R. Tiffin, Notary Public

My Commission Expires: February 6, 1992



EMPHASIS OIL OPERATIONS

P. O. BOX 506

RUSSELL, KS 67665

DRILLERS LOG

15135-23284-0000

OPERATOR: Ranken Energy Corporation
3206 Teakwood Lane
Edmond, Oklahoma 73013

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, KS 67665

LEASE: Kleweno

WELL #1

LOCATION: SW NW NW
Section 11-19S-22W
Ness County, Kansas

LOGGERS TOTAL DEPTH: 4360'

ROTARY TOTAL DEPTH: 4360'

COMMENCED: 10/13/88

CASING: 8-5/8" @ 701' w/180 sks cement

ELEVATION: 2204' K.B.

COMPLETED: 10/20/88

STATUS: Dry Hole

RECEIVED
STATE CORPORATION COMMISSION

OCT 25 1988

CONSERVATION DIVISION
Wichita, Kansas


DEPTHS & FORMATIONS

(All measurements from K.B.)

Top Soil, Sand & Clay	80'	Red Bed	1475'
Blue Shale	378'	Anhydrite	1498'
Dakota Sand	460'	Red Bed	1800'
Red Bed	580'	Shale & Lime Stks.	3700'
Cheyenne Sand	640'	Lime & Shale Stks.	4100'
Red Bed	914'	Lime (R.T.D.)	4360'
Cedar Hills & Sand	1158'		


STATE OF KANSAS)
) ss
COUNTY OF RUSSELL)


Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.

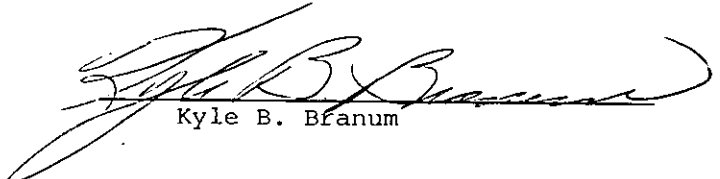
Kyle B. Branum

Subscribed and sworn to before me on October 24, 1988.

My commission expires: February 6, 1992.




Glenda R. Tiffin, Notary Public