


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Barber County, Sec. 13 Twp. 31 Rge. 14W E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
SW SW SE  
Lease Owner Midwestern Supply Co., Inc.  
Lease Name Riepe #1 Well No. \_\_\_\_\_  
Office Address Wichita, Kansas 67202  
Character of Well (Completed as Oil, Gas or Dry Hole) \_\_\_\_\_

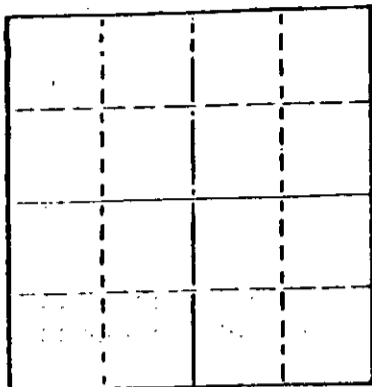

Locate well correctly on above  
Section Plot

Date Well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 11/11/76 \_\_\_\_\_ 19\_\_\_\_  
Plugging completed 11/13/76 \_\_\_\_\_ 19\_\_\_\_  
Reason for abandonment of well or producing formation  
depleted. \_\_\_\_\_

If a producing well is abandoned, date of last production  
\_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3110  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4	214	none
				4 1/2	3097	737'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Ran sand to 3050' and ran 4 sacks cement. Shot pipe at 2500', 2404', pipe parted, pulled 23 joints. Mudded hole to 200', set 10' rock bridge and filled hole with 4 yards ready mix from 190' to base of cellar.

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION

NOV 22 1976  
11-22-76

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING  
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.  
R. DARRELL KELSO (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) \_\_\_\_\_

CHASE, KANSAS  
(Address)

SUBSCRIBED AND SWORN TO before me this 18th day of November, 19 76

My commission expires \_\_\_\_\_



Margaret Melcher  
Notary Public.

DRILLERS LOG

CASING RECORD:  
10 3/4 set at 214'  
w/225 sacks cement

OPERATOR: Dean Allison Oil Company

CONTRACTOR: Search Drilling Company

COMMENCED: April 29, 1975

COMPLETED: May 7, 1975.

DESCRIPTION

SW SW SE  
Sec.13-31S-14W  
Barber County,  
Kansas

TOTAL DEPTH

3110

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand	0	67	
Shale	67	224	
Shale	224	255	
Shale	255	1119	
Shale	1119	1770	
Shale and Lime	1770	1900	
Lime, Shale and Flint	1900	1957	
Shale	1957	2060	
Shale	2060	2180	
Lime	2180	2375	
Lime and Shale	2375	2457	
Lime	2457	2555	
Lime	2555	2629	
Shale and Lime	2629	2680	
Lime	2680	2735	
Shale, Lime and Sand	2735	2802	
Shale and Lime	2802	2926	
Lime and Shale	2926	3055	
Lime and Shale	3055	3110	

4 1/2" new set  
set at 3097'  
cemented with  
175 sacks 60-40  
pos-mix-10% salt  
by Allied Cementing  
Company. Drill  
plug at 4:30 PM

RECEIVED  
STATE CORPORATION COMMISSION


NOV 08 1976  
11-8-76  
CONSERVATION DIVISION  
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge and belief.

SEARCH DRILLING COMPANY

M. A. Dressen  
M. A. Dressen

Subscribed and sworn to before me this 9th. day of May, 1975



Virginia S. Fabian  
Virginia S. Fabian Notary Public