

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Barber County, Sec. 9 Twp. 31S Rge. 14 ~~XXX~~W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C NW SE

Lease Owner DuPont Oil Co.

Lease Name SKINNER Well No. 1

Office Address 660 Edgewater Road, Wichita, Kansas

Character of Well (Completed as Oil, Gas or Dry Hole)

Dry Hole

Date Well completed October 30 1976

Application for plugging filed (Verbally) October 30 1976

Application for plugging approved (verb.) October 30 1976

Plugging commenced October 30 1976

Plugging completed October 30 1976

Reason for abandonment of well or producing formation


No commercial quantity of oil or gas encountered

If a producing well is abandoned, date of last production

19

Was permission obtained from the Conservation Division or

its agents before plugging was commenced? Yes

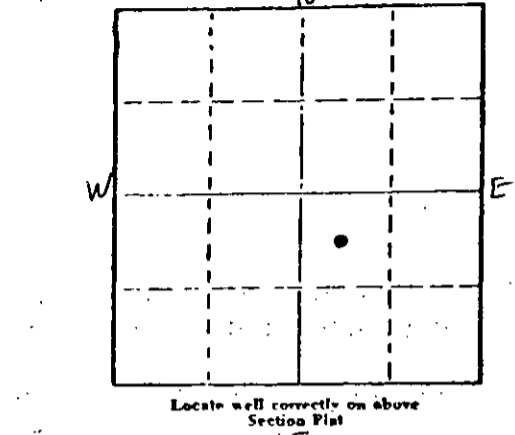

Name of Conservation Agent who supervised plugging of this well G. R. Bitterstein

Producing formation Depth to top Bottom Total Depth of Well

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set 1st plug at 300' with 40 sx.
2nd plug at 40' with 10 sx.
Rathole with 5 sx.

NOV 04 1976
11-476
CONSERVATION DIVISION
Wichita, Kansas

Plug was down at 4:30 p.m. 10-30-76.
State Plugger - G. R. Bitterstein.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.

STATE OF Kansas COUNTY OF Sedgwick ss.
Jerry A. Langrehr, Exec. V.P.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jerry A. Langrehr
801 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of November 1976

My commission expires _____

Kathy S. Goertz
Kathy S. Goertz 3 Notary Public.



CONTRACTOR'S WELL LOG

OPERATOR: DuPont Oil Co.
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: SKINNER #1
 LOCATION: C NW SE, Section 9-31S-14W
 Barber County, Kansas
 SPUD DATE: October 20, 1976
 COMPLETION DATE: October 30, 1976

0	163	Sand & Red Bed	
163	1420	Red Bed & Shale	
1420	1695	Shale & Shells	RECEIVED
1695	2215	Shale & Lime	STATE CORP. HIGHWAY DEPT.
2215	2475	Lime & Shale	
2475	2897	Shale & Lime	NOV 04 1976
2897	2990	Lime & Shale	11-4-76
2990	3060	Shale & Lime	CONSERVATION DEPT.
3060	3737	Lime & Shale	Wichita, Kansas
	3737	Rotary Total Depth	

Ran 4 jts. of 13 3/8" casing, (Tally 156.38') Set at 154' with 250 sx. of common cement, 3% Ca. Cl., 2% gel. Cement did circulate. Job complete at 1:30 a.m. - 10-20-76.

Ran 21 jts. of new 8 5/8" surface casing - 24#. (Overall tally 829.66) Set at 824' with 250 sx. of 50/50 posmix, 6% gel, 2% Ca. Cl., 2% Ca. Cl., followed by 175 sx. of common cement, 3% Ca. Cl., 2% gel. Plug was down at 6:30 p.m. 10-20-76. Cement did circulate.

T.D. 3657', Set 1st plug at 300' with 40 sx., 2nd plug at 40' with 10 sx., Rathole with 5 sx. Plug was down at 4:30 p.m. 10-30-76. State Plugger - G. R. Bitterstein.

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Jerry A. Langrehr, Executive Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the SKINNER #1, C NW SE, Section 9-31S-14W, Barber County, Kansas.

ABERCROMBIE DRILLING, Inc.

BY: Jerry A. Langrehr
 Jerry A. Langrehr, Exec. V.P.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 3rd day of November, 1976

Kathy S. Goertz
 Kathy S. Goertz, Notary Public



COPY