

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas


FILE NO. 41-18LOCATION C. SE-NESEC. 8 TWP. 17 RGE. 14-WDry Hole Abandoned Oil Well Abandoned Gas Well X

I have today completed supervision of plugging of:

Well No. 2 Lease A. J. HarrisOperator Barbara Oil Co Address Medicine Lodge - KansasField County BarberTotal Depth 4582 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 10 3/4 - 682 ft Circulated with Cement
7" casing set at 4578 ft & cemented - Plugged back
from bottom with Lave Wells Plug & 3450 ft. 3 sacks
of cement on top of Plug at 3450 ft. Shot & Pulled
2160 ft of 7" casing - Filled with mud to 250 ft - Bridge
& 10 sacks of cement - Mud to 25 ft - Bridge & 12 sacks
of cement - Junc Barnes - Pipe Pulling - Contractor

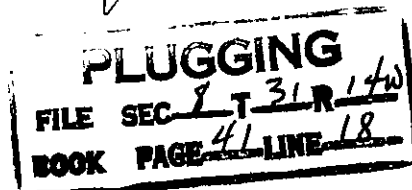

STATE CORPORATION COMMISSION
District Conservation Agent
Date 7-23-48

7-30-48