

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Barber

County, Sec. 26 Twp. 31 Rge. 14 (E) W (W)

Location as "NE/CNW/SW" or footage from lines c NE/4 SE/4

Lease Owner Mull Drilling Co., Inc.

Lease Name Mills Well No. 1

Office Address 670 N Fourth National Bank Bldg. Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 11-13- 19 59

Application for plugging filed 11-13 19 59

Application for plugging approved 11-13 19 59


Plugging commenced 11-13 8:00 P. M. 19 59

Plugging completed 8:30 P. M. 11-13 19 59

Reason for abandonment of well or producing formation No production

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes



Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Fred W. Hampel

Producing formation none Depth to top Bottom Total Depth of Well 4770 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole filled with drilling fluid to depth of 240'. #1 plug pushed to this depth with drilling pipe 1/4 sack hulls put on top of plug. 18 sacks of cement put on top of plug through drill pipe. Drill pipe pulled out of hole. # 2 plug added with 1/4 sack hulls and pushed to depth of 40'. Hole was filled with drilling mud to this depth. 10 sacks cement put on top of plug through drill pipe. Drill pipe pulled out of hole. Two sacks of cement put in rat hole. Completed plugging.

RECEIVED
STATE CORPORATION COMMISSION

NOV 23 1959
11-23-59
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Company tools

Address

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Joseph O. Butts (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joseph O. Butts

(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of November, 1959

My commission expires February 24, 1960

Madge N. Miller Notary Public.



ROTARY DRILLERS LOG

COMPANY: Mull Drilling Co., Inc. Et Al
Wichita, Kansas

DRILLING COMMENCED: 10-26-59

CONTRACTOR: Mull Drilling Co., Inc.
Wichita, Kansas

DRILLING COMPLETED: 11-12-59

CASING RECORD: 927' of 8 5/8" csg.
w/150 sax cmt.
D & A

LOCATION: GOVAN MILLS #1
C NE SE 26-31S-14W
Barber County, Kansas

(Figures indicate bottom of formation - measurements from top of Rotary Bushing.)

1530'	Shale & Shells
2230'	Lime and Shale
2283'	Lime
2965'	Lime and Shale
3064'	Sandy Lime & Shale
3755'	Lime w/Shale
3873'	Sandy Lime w/Shale
3986'	Lime w/Shale
4030'	Lime
4174'	Lime w/Shale
4204'	Lime
4258'	Lime w/Shale
4426'	Lime
4450'	Mississippi
4471'	Lime
4540'	Kinderhook chert
4647'	Lime & chert
4730'	Lime w/Sandy Shale
4770'	Arbuckle - Total Depth

RECEIVED
STATE CORPORATION COMMISSION

NOV 24 1959
11-24-59
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify that this is a true and correct copy of the above log to the best of my knowledge.


MULL DRILLING COMPANY, INC.

R. James Gear
R. James Gear

STATE OF KANSAS)
) SS
) SEDGWICK)

Subscribed and sworn to before me this 23rd day of November, 1959.

My Commission Expires February 24, 1960

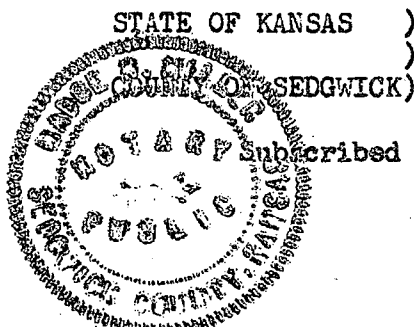

Madge N. Miller
Madge N. Miller, Notary Public