

15-007-00383-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Barber

County. Sec. 24 Twp. 31S Rge. 14W (E) (W)

Location as "NE/CNW/SW" or footage from lines SE SE NW

Lease Owner National Cooperative Refinery Association

Lease Name JOHNSON Well No. 1

Office Address 305 Rule Building, Wichita, Kansas.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed September 10 19 57

Application for plugging filed September 12 19 57

Application for plugging approved September 12 19 57

Plugging commenced September 10 19 57


Plugging completed September 10 19 57

Reason for abandonment of well or producing formation Dry Hole-No Commercial

Production Obtained.

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

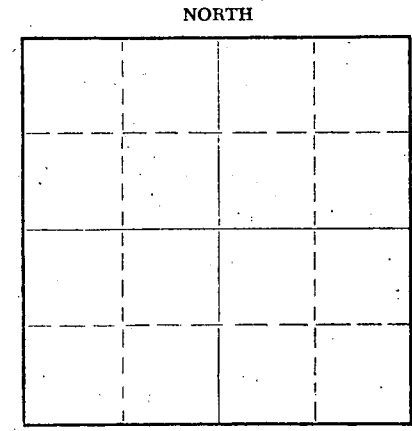

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well M.A. Rives

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4665 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	175'	None-Cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mudded hole to 226'. Set plug / 20 sacks of cement. Mudded hole to 35'. Set plug / 2 10 sacks of cement on up to base of cellar.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Virginia Drilling Company
Address 712 Brown Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. C.R. Sears (employee of owner) or (~~owner~~/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C.R. Sears (C.R. Sears)
305 Rule Building, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 19th day of September 19 57

My commission expires November 26, 1960

Nell McComb
NELL McCOMB
Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

SEP 20 1957
9-20-57
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING			
FILE	SEC	T	R
	24	31	14W
BOOK	PAGE	LINE	
	45	9	

Well: Johnson #1
 Location: SE SE NW, Section 24-31s-14w, Barber County, Kansas
 Company: NCRA
 Contractor: Virginia Drilling Co., Inc.
 Commenced: August 19, 1957
 Completed: September 11, 1957
 Total Depth: 4665
 Elevation: 1624 D.F.

FORMATION	DEPTH		
Surface clay-shale	0-223		
Shale-lime	223-690		
Shale	690-1000	Set 8-5/8" csg. @ 226'	
Shale-shells	1000-1300	w/175 sks. cement.	
Shale-lime	1300-1630		
Lime	1630-2060		
Lime-shale	2060-2495		
Lime	2495-2550	TOPS:	
Lime-shale	2550-3292	Heebner	3594
Lime	3292-3565	Douglas	3640
Lime-shale	3565-3735	Lansing K.C.	3782
Lime	3735-3783	Cong.	4310
Kansas City Lime	3783-3796	Miss.	4365
Lime	3796-4303	Kind.	4401
Lime-shale	4303-4340	Viola	4465
Lime	4340-4380	Simpson	4539
Lime-chert	4380-4415	Arbuckle	4615
Lime-Miss.	4415-4470		
Lime-chert	4470-4590		
Shale-sand	4590-4618		
Lime	4618-4640		
Arbuckle	4640-4665		

S. A. Murphy
 S. A. Murphy

Subscribed and sworn to before me, a Notary Public, this 16th day of September, 1957.

Inez M. Underwood
 Inez M. Underwood

My commission expires March 15, 1958.

PLUGGING
 FILE SEC 24 T 31 R 14W
 BOOK PAGE 45 LINE 9

SEP 20
 7-20-57
 DIVISION
 Wichita, Kansas