


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

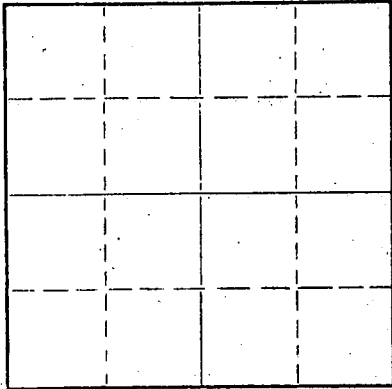

Locate well correctly on above
Section Plat

Barber County, Sec. 18 Twp. 31S Rge. 14 (E) (W)

Location as "NE/CNW/SW" or footage from lines 100'S of NW NE SW

Lease Owner Brooks Hall

Lease Name Shaft

Well No. 1-A

Office Address 1710 Liberty Bank Bldg., Oklahoma City, Okla.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed January 11 1966

Application for plugging filed January 11 1966

Application for plugging approved January 11 1966

Plugging commenced January 11 1966

Plugging completed January 11 1966

Reason for abandonment of well or producing formation did not get surface
pipe cemented

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Archie Elving

Producing formation Depth to top Bottom Total Depth of Well 915 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	905'	330'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud to 300' and 30 sxs Cement.

Mud to 35' w/20 sxs. Cement.

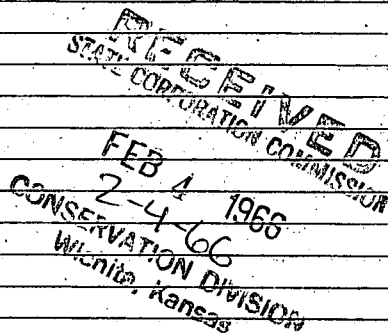

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor

Address

STATE OF KANSAS, COUNTY OF BARTON, ss.

Jack M. Dunham

(employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Box 783, Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of February, 1966

My commission expires January 24, 1968

Dorothy Tully

Notary Public.

D R I L L E R S L O G

Shaft #1-A

CASING RECORD:	COMPANY: Brooks Hall	DESCRIPTION: 100'S of
905' 8-5/8"		NW NE SW
	CONTRACTOR: Aspen Drilling Co.	Sec. 18-T31S-R14W
TOTAL DEPTH:		Barber Co., Kansas
915'	COMMENCED: January 9, 1966	
	COMPLETED: January 11, 1966	

<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Remarks</u>
Clay & Hyp Rock	0	100	Spudded on 1-10-66.
Red Rock & Shale	100	590	Ran 49 Jts. 905' 8-5/8" Csg.
Shale & Red Bed	590	915	Set @ 913'. Cemented bottom w/150 sxs. Cem. w/2% C.C. Plug down @ 9:15 A.M. Plug & cement went out of pipe. Re- cemented bottom w/100 sxs. Poz. Plug down @ 2:30 P.M.

STATE OF KANSAS

SS

COUNTY OF BARTON


RECEIVED
STATE CORPORATION COMMISSION

FEB 4 1966

2-4-66

CONSERVATION DIV.
Wichita, Kansas

The undersigned, being duly sworn on oath, states that the above statement and log are true and a correct record and log of the well drilled at the location above described.


Jack M. Dunham, Tool Pusher