


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

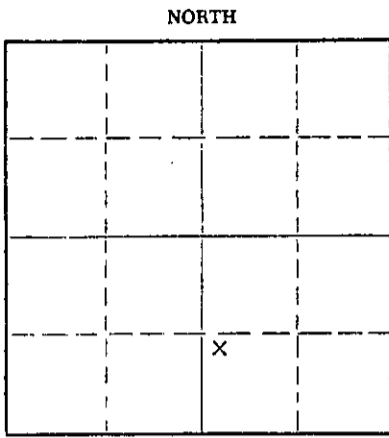

Barber County. Sec. 31 Twp. 33S Rge. 12 (E) (W)
Location as "NE/CNW/SW" or footage from lines NW SW SE
Lease Owner Bulldog Pipe and Supply Co.
Lease Name McCracken A Well No. 1
Office Address 309 Mayo Bldg. Tulsa, Okla.
Character of Well (completed as Oil, Gas or Dry Hole) oil well
Date well completed April 30, 1956 19
Application for plugging filed 1-17-69 19
Application for plugging approved 1-17-69 19
Plugging commenced 3-4-69 19
Plugging completed 3-8-69 19
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production _____ 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Ralph Warren
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4688 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	298'	
				5 1/2	4723'	3489.11

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill bottom from 4688 to 4600' with chat, mix and dump 5 sacks cement.
Set 10' rock bridge from 250' to 240', dump 25 sacks of cement, mud hole to 40', add 10' of rock to 30', 10 sacks of cement to surface.

RECEIVED
STATE CORPORATION COMMISSION
MAR 24 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Flint Engineering and Const. Co.
Address 2375 W. Central El Dorado, Kansas

STATE OF Kansas, COUNTY OF Butler, ss.

_____(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Handwritten Signature]

(Address) _____, 19 69

SUBSCRIBED AND SWORN TO before me this 20 day of March,
Sept. 19, 1971

[Handwritten Signature]
Notary Public.



WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


Company- BACHUS OIL
Farm- McCracken "A" No. 1

SEC. 31 T. 33 R. 12W
NW SW SE

T.D. 4086'

Total Depth. 4722'
Comm. 4-18-56 Comp. 4-30-56
Shot or Treated.
Contractor. Strata Drilg.
Issued. 9-6-58

County Barber
KANSAS



Elevation. 1579' RB

Production. 15,000,000 CFG.

CASING:

8 5/8" 298' cem w/200 sx.
5 1/2" 4726' cem w/200 sx.

Figures Indicate Bottom of Formations.

surface soil & sand	50
shale, red bed	298
red bed	550
shale, shells	1490
Anhydrite	1515
shale, shells	1700
shale, lime	1900
lime, shale	2055
lime, shale	2350
lime	2425
shale, sand	2640
shale, lime	3980
lime	4722
Total Depth	

TOPS: SCOUT

Heebner	3800
Lansing	3978
Mississippi	4622

JAN 17 1969

JAN 17 1969