

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Barber County, Sec. 18 Twp. 31 Rge. 14 (E) (W) X

Location as "NE/CNW&SWX" or footage from lines SE SE SE-NW

Lease Owner Leben Drilling, Inc.

Lease Name Shaft Well No. 1

Office Address P. O. Box 486 Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed 8-20-69 19__

Application for plugging approved 8-21-69 19__


Plugging commenced 11-12-69 19__

Plugging completed 11-15-69 19__

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

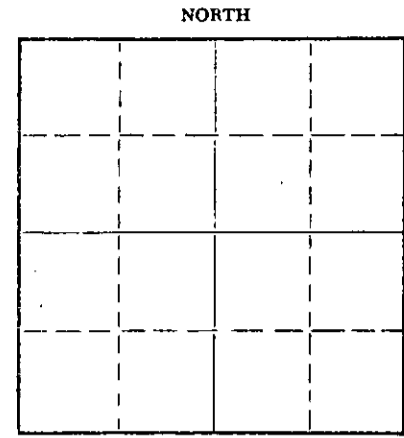

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Ralph Warren

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4651 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	RECEIVED			13	201	None
	STATE CORPORATION COMMISSION			8 5/8	1108	None
	11-21-69			5 1/2	None	2445
	NOV 21 1969					
	CONSERVATION DIVISION					
	Wichita, Kansas					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Moved rig into location, with the help of Clark Oilfield Service.

Put up pole. Dug cellar. Set plug at 3000'. Put 20' of sand on plug. Dumped 5 sacks of cement with dump bailer. Had collar welded and strapped on 5 1/2" pipe. Rigged up jacks - took slips out of braden head. Worked pipe - 24" stretch at 2500 psi or 107,000.#

Worked pipe. Shot pipe at 2490'. Worked pipe loose at 2500 psi or 107,000 lbs. Pulled 52 joints of casing.

Finished pulling casing - 36 joints. Tallied casing. Filled hole with mud to 250'. Put in 10' rock bridge. Dumped 25 sacks of cement. Filled hole with mud to 40'. Capped well with 10 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc.

Address P. O. Box 221 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss. James W. Rockhold


(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold

P. O. Box 221 Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 19 day of November, 19 69



Glen D. Pugh

Notary Public.

My commission expires May 27, 1973

DRILLER'S LOG

COMPANY Tilco, et al
 CONTRACTOR LEBEN DRILLING, INC.
 FARM SHAFT #1
 LOCATION 100' N & 100' W of Center SECTION 18-31S-14W
 BARBER COUNTY, KANSAS
 COMMENCED 12-28-68
 COMPLETED 1-17-69

0	202	Red Bed
202	720	Red Bed
720	1561	Shale
1561	1568	Anhydrite
1568	1670	Shale
1670	1720	Shale, Lime
1720	1885	Lime, Shale
1885	2600	Lime
2600	3050	Shale, Lime
3050	3200	Lime
3200	3445	Lime, Shale
3445	3603	Lime
3603	3821	Lime, Shale
3821	4355	Lime
4355	4465	Lime, Chert
4465	4470	Lime
4470	4501	Lime, Chert
4501	4599	Sand
4599	4615	Shale, Sand
4615	4630	Lime
	<u>4650</u>	<u>RTD</u>

RECEIVED
 STATE CORPORATION COMMISSION
 8-20-69
 AUG 20 1969
 CONSERVATION DIVISION
 Wichita, Kansas

13" 50# used surface casing set @ 201' cemented with 200 sacks Common Sunset cement.

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Shaft #1 well, located 100' N & 100' W of Center of Section 18, Township 31 South, Range 14 West, Barber County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite

Leslie Kite

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 24th day of January, 1969.

Ulanda Nichols

Ulanda Nichols

My Commission Expires:
 April 1, 1971