

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION SW-SW-SWSEC. 25 TWP. 19 RGE. 16WDry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

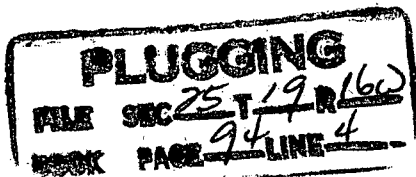
I have today completed supervision of plugging of:

Well No. 1 Lease Conrad & TammannOperator Burwich, Spruill & Hermann Address Great Bend - KansasField _____ County BushTotal Depth 3710 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 1/8 - 1027 ft - Circulated with cement
6" casing set at 3709 ft. Plugged back from bottom
to 3658 ft - with Mud & Rock - Dumped 5 sacks of
cement at 3650 ft - Shot of & Pulled the 6" casing - Filled
with mud to 258 ft - Set Rock Bridge & 15 sacks cement
at 250 ft - Mud to 30 ft - Plug & 10 sacks of cement
at the surface

RECEIVED
APR 30 1949
4-30-49

C. M. Stough -
District Conservation AgentDate 4-26-49

STATE CORPORATION
COMMISSION
KANSAS