

15-135-20956-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Ness County, Sec. 27 Twp. 20S Rge. (E) 22 (W)

Location as "NE/CNW/SW" or footage from lines. 150' so. of NW SW

Lease Owner O. A. Sutton

Lease Name Mary "B" Well No. 2

Office Address 800 Sutton Place, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed October 9 1974

Application for plugging filed October 9 1974

Application for plugging approved October 9 1974


Plugging commenced October 9 1974

Plugging completed October 9 1974

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

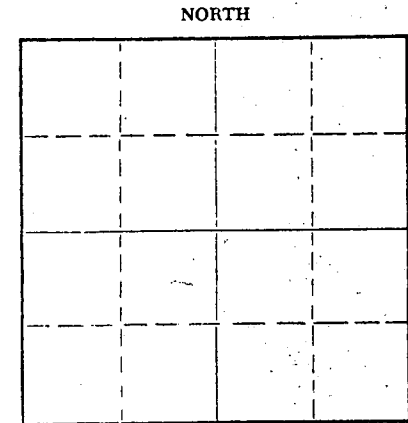

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 4420 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	441'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug at 451' with 60 sacks cement; plug at 40' with solid bridge and 10 sacks cement. Job complete at 6:30 a.m. 10-9-74.
Job by Halliburton.

RECEIVED
STATE CORPORATION COMMISSION
OCT 21 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.

Address 830 Sutton Place, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK ss. Jack G. Paulsen (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack G. Paulsen
800 Sutton Place, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of October, 1974.

My commission expires June 28, 1978.

Jean S. Taylor Notary Public.

GABBERT-JONES, INC.
 WICHITA, KANSAS
 DRILLERS' WELL LOG

15185 20956 0000

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 21 1974
 CONSERVATION DIVISION
 Wichita, Kansas

Mary B #2
 150' S of NW-SW Sec 27-20S-22W
 Ness County, Kansas

Commenced: 9-27-74

Completed: 10-9-74

OPERATOR: O. A. SUTTON

Depth		Formation	Remarks
From	to		
0	446	Surface Clay-Sand-Shale	
446	494	Shale	Ran 11 jts of used 8-5/8" casing
494	840	Shale-Redbed	24# set @ 441' Cemented
840	1050	Sand	w/250 sks Common 2% Gel
1050	1346	Shale-Redbed	3%CC PD @ 1:00 a.m. 9-28-74
1346	1389	Redbed	Cement Circ
1389	1425	Anhy	
1425	1600	Shale-Shells	
1600	2055	Shale-Redbed	
2055	2221	Shale	
2221	2405	Shale-Lime	
2405	3877	Lime-Shale	
3877	4339	Lime	
4339	4352	Lime-Chert	
4352	4369	Lime	
4369	4420	Conglomerate	DRY AND ABANDONED

I, James S. Sutton II, certify this is a correct copy of the Drillers' Log for the well drilled 150' S of NW-SW Sec 27-20S-22W Ness County Kansas to the best of my knowledge and belief.

James S. Sutton II
 JAMES S. SUTTON II

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this the 10th day of October 1974, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the year last above written.

Marjorie Hall
 MARJORIE HALL-NOTARY PUBLIC

My Commission Expires: November 29th, 1975

