


15-135-2464-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

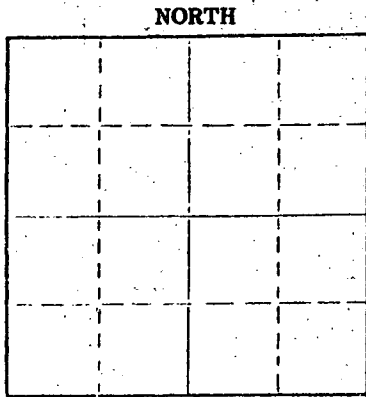

Locate well correctly on above Section Plat

Ness County, Sec. 28 Twp. 20S Rge. (E) 22 (W)
 Location as "NE/CNW/SE/SW" or footage from lines: C NE NW
 Lease Owner: O. A. Sutton
 Lease Name: Bowman Well No. 2
 Office Address: 800 Sutton Place, Wichita, Kansas 67202
 Character of Well (completed as Oil, Gas or Dry Hole): Dry Hole
 Date well completed: February 25 1976
 Application for plugging filed: February 25 1976
 Application for plugging approved: February 25 1976
 Plugging commenced: February 25 1976
 Plugging completed: February 25 1976

Reason for abandonment of well or producing formation _____
 If a producing well is abandoned, date of last production _____ 19____
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well: Leo Massey
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well: 4374 feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	472'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Squeezed through 8-5/8" with 125 sacks 60-40 Pozmix, 6% gel.
 Job complete at 12:45 p.m. 2-25-75. Job by Halliburton.

RECEIVED
STATE CORPORATION COMMISSION

MAR 25 1976

3-25-76

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____
 Address _____

STATE OF KANSAS COUNTY OF SEDGWICK ss.

Jack G. Paulsen

(employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Jack G. Paulsen
 800 Sutton Place, Wichita, Kansas 67202
 (Address)

SUBSCRIBED AND SWORN to before me this 24th day of March 1976

My commission expires June 28, 1978.

Jean S. Taylor
 Jean S. Taylor

Notary Public.

15 135 21164 0000

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

Bowman #2
C-NE-NW Sec 28-20S-22W (approx)
Ness County Kansas

Commenced: 2-14-76

Completed: 2-25-76

OPERATOR: O. A. SUTTON

Depth		Formation	Remarks
From	To		
0	130	Sand	Ran 12 jts of 28#
130	1050	Sand-Shale	8 5/8" csg set @ 472'
1050	1404	Shale-Redbed	Cemented w/275 sks Common
1404	1440	Anhy	2% Cel - 3% CC
1440	1835	Shale	PD @ 2:15 p.m. 2-14-76
1835	2160	Shale-Lime	
2160	2435	Lime-Shale	
2435	2595	Shale-Lime	
2595	3765	Lime-Shale	
3765	4374	Lime	

DRY & ABANDONED

I, James S. Sutton II, certify this is a correct copy of the Drillers' Log for the well drilled Approx C-NE-NW Sec 28-20S-22W, Ness County, Kansas to the best of my knowledge and belief.

RECEIVED
STATE OF KANSAS
CONSERVATION COMMISSION

MAR 25 1976

James S. Sutton II
JAMES S. SUTTON II

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

CONSERVATION DIVISION
Wichita, Kansas

Before me, the undersigned, a Notary Public within and for said County and State, on this 8th day of March, 1976, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

Elizabeth J. Edwards
ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission Expires: February 6, 1979

