


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 Give All Information Completely
 Make Required Affidavit
 Mail or Deliver Report to:
 Conservation Division
 State Corporation Commission
 212 No. Market
 Wichita, Kansas

WELL PLUGGING RECORD

Barber County. Sec. 2 Twp. 33 Rge. 11 (E) (W) X
 Location as "NE/CNW&SW4" or footage from lines. E/2 NW SE
 Lease Owner Sierra Petroleum Company, Inc.
 Lease Name Davis Well No. 1
 Office Address P. O. Box 232 Russell, Kansas
 Character of Well (completed as Oil, Gas or Dry Hole) _____
 Date well completed _____
 Application for plugging filed _____ 19____
 Application for plugging approved _____ 19____
 Plugging commenced 11-6-69 _____ 19____
 Plugging completed 11-12-69 _____ 19____
 Reason for abandonment of well or producing formation _____

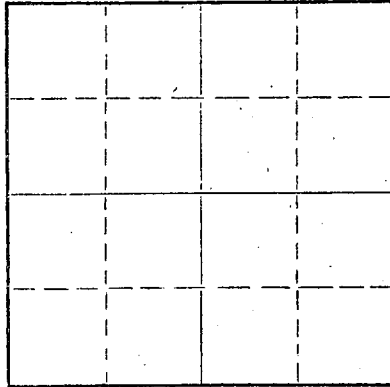

Locate well correctly on above Section Plat.

If a producing well is abandoned, date of last production _____ 19____
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ralph Warren
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4559 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	208	None
				4 1/2	None	3686'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Moved in. Put up pole. Started digging cellar.
Plugged bottom back with sand to 4500'. Finished digging cellar.
Rigged up. Worked pipe - 29" stretch at 1,600 psi or 70,000 lbs.
Dumped 3 sacks of cement at 4500' with dump bailer. Shot pipe at 4050' - 3950' - 3850' and 3750'. Worked pipe loose. Laid down 30 joints of casing.
Laid down 83 joints of casing.
Loaded out rig. Bailed hole to 200'. Put in 10' rock bridge.
Filled hole from 190' to top with 3 yards of ready mix cement.
Tearing down. Moved off location.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc.
 Address P. O. Box 221 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
 (Signature) James W. Rockhold
P. O. Box 221 Great Bend, Kansas
 (Address)

SUBSCRIBED AND SWORN TO before me this 19 day of November, 1969

My commission expires May 27, 1973



Notary Public.

SIERRA PETROLEUM CO., INC. - Operator

DAVIS #1
C NW SE
Sec. 2-33S-11W
Barber County, Kansas

T. D.: 4559'
Elev.: 1554' K.B.

Commenced: 8-20-64
Completed: 8-30-64

Casing:

8-5/8" Set at 208'
4-1/2" Set at 4558'

Cement:

with 165 sx. Common
with 100 sx. Pozmix

FORMATION

DEPTH

Red Bed	60
Red Bed & Shale	1390
Shale & Shells	1600
Lime & Shale	3655
Shale, Lime & Sand	3817
Lime	4530
Chert	4540
Lime Chert	4559

RECEIVED
STATE CORPORATION COMMISSION
OCT 23 1964
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) ss:
COUNTY OF RUSSELL)

I hereby certify that the above information is true and correct to the best of my knowledge.

B. P. Hall
Superintendent

Subscribed and sworn to before me this day, 3rd September, 1964.

Lucy Dwyer
Notary Public

My commission expires: 10-17-67