


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Barber County, Sec. 27 Twp. 30S Rge. 14W E/W  
Location as "NE/CNW1SW1" or footage from lines  
660' FSL & 1,980 FEL  
Lease Owner Texas Oil & Gas Corp.  
Lease Name Pickens Well No. 1  
Office Address 200 W. Douglas Suite 300, Wichita Ks.  
Character of Well (Completed as Oil, Gas or Dry Hole)  
Dry Hole  
Date Well completed August 7, 1977  
Application for plugging filed Verbal Application 1977  
Application for plugging approved Verbal Approval 1977  
Plugging commenced August 7, 1977  
Plugging completed August 7, 1977  
Reason for abandonment of well or producing formation

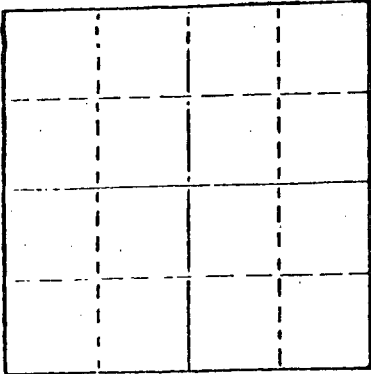

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Owen  
Producing formation RECEIVED Depth to top Bottom Total Depth of Well 3,976  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	342'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid  
was placed and the method or methods used in introducing it into the hold. If cement or other  
plugs were used, state the character of same and depth placed, from feet to  
feet for each plug set.

Filled hole with heavy rotary mud from 3,976 ft. (rotary total depth)  
to 340 ft. Set plug at 340 ft. and cemented with 35 sacks cement.  
Filled hole with heavy rotary mud from 340 ft. to 40 ft.  
Set solid plug at 40 ft. and cemented to cellar with 15 sacks  
cement, 5 sacks cement in rat hole.


Plugging operations accomplished utilizing Halliburton Oil Well  
cementing pump truck through 4 1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Services  
410 Union Center Bldg. Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.  
Dean Britting, Agent (~~agent~~ of owner) or (~~owner~~)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of  
the facts, statements, and matters herein contained and the log of the above-described well  
as filed and that the same are true and correct. So help me God

(Signature) Dean Britting  
200 No. Main, Wichita, Kansas 67202  
(Address)



SUBSCRIBED AND SWORN TO before me this 16th day of August, 19 77  
Elsie Willison  
Elsie Willison- Notary Public.

My commission expires June 30, 1978

15-007-20526-0000  
**KANSAS GEOLOGICAL SOCIETY**  
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU  
 KANSAS GEOLOGICAL SOCIETY BUILDING  
 508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **Texas Oil & Gas Corp.**

SEC: 27 T 30S R 14W  
 LOC: 660' FSL & 1,980' FSL


FARM **Pickens**

NO. **1**

TOTAL DEPTH **3,976'**  
 COMM. **July 31, 1977**  
 SHOT OR TREATED  
 CONTRACTOR **H-30, Inc.**  
 ISSUED **August 16, 1977**

COMP. **August 7, 1977**

COUNTY **Barber**  
 KANSAS



CASING

20	10	
15	8	5/8" 342' cemented w/300 sxs cemented
12	6	
13	5	

ELEVATION **1,859 KB.**

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Red Bed and Shale	1,000'
Shale	1,775'
Lime and Shale	2,250'
Shale and Lime	2,973'
Lime and Shale	3,976'
Rotary Total Depth	3,976'

I hereby certify the above and foregoing to be a true and correct log of the above described

well as shown by the drilling reports.

RECEIVED  
 STATE CORPORATION COMMISSION


H-30, Inc.

AUG 18 1977  
 8-18-77  
 CONSERVATION DIVISION  
 Wichita, Kansas

*Dean Britting*  
 Dean Britting

State of Kansas }  
 County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public  
 in and for said county and state this 16th day of  
 August, 1977



*Elsie Willison*  
 Elsie Willison - Notary Public

My Commission Expires:  
 June 30, 1978