


Give Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

15-135-20052-0000
WELL PLUGGING RECORD

Ness County, Sec. 24 Twp. 20S Rge. (E) 22 (W)

Location as "NE/CNW&SW" or footage from lines A/C NW/4 SW/4
Lease Owner Barnett Oil Company
Lease Name Hopper Well No. 1
Office Address 411 First Nat'l Bank Bldg., Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 26, 1967
Application for plugging filed August 28, 1967
Application for plugging approved August 26, 1967
Plugging commenced August 26, 1967
Plugging completed August 26, 1967
Reason for abandonment of well or producing formation Dry Hole

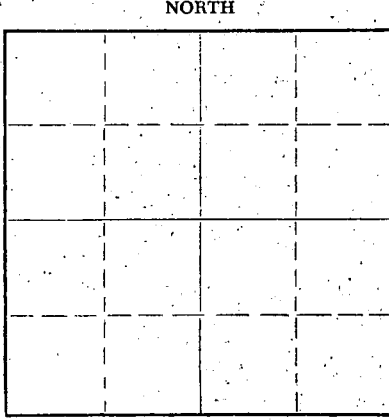

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production - - - 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4398 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				<u>8 1/8"</u>	<u>258'</u>	<u>None</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pulled pipe to 600'; through drill pipe spotted 100 sacks Posmix cement with 6% gell. Cement up to within 170' of surface. At 60' built bridge and filled pipe to surface with cement.

Completed at 4:00 P.M., 8-26-67.

(Well Log attached)

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor K & E Drilling, Inc.
Address 719 Union Center Building, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
J. G. Gould, partner of Barnett Oil Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
411 First Nat'l Bank Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of August, 19 67

My commission expires February 27, 1968.
Mildred F. Willis
Notary Public.



DRILLER'S WELL LOG

15735-20052-0000

OPERATOR: Barnett Oil Company
411 First National Bank Bldg.
Wichita, Kansas 67202

WELL NAME: #1 Hopper
LOCATION: C NW SW
Section 24-20S-22W
Ness County, Kansas

CONTRACTOR: K&E DRILLING, INC.
719 UNION CENTER BLDG.
WICHITA, KANSAS

COMMENCED: 8/17/67
COMPLETED: 8/26/67
ELEVATION: 2221' Grd; 2227' K.B.;
2230' D.F.

CASING RECORD:
8-5/8 @ 258' w/180 sx.

ROTARY TOTAL DEPTH: 4398'

PRODUCTION: Dry

FORMATION RECORD

Depths shown indicate bottom of formations encountered.

Shale & Lime	258
Clay	595
Shale	775
Anhydrite	800
Shale & Shells	1465
Shale	1785
Shale & Lime	1923
Lime	4398

RECEIVED
STATE CORRELATION COMMISSION

AUG 30 1967

CONSERVATION DIVISION
Wichita, Kansas

CERTIFICATION

State of KANSAS }
County of SEDGWICK } ss:

I, H. L. Wilson, of K&E DRILLING, INC., upon oath state that the above and foregoing is a true and correct copy of the Driller's Log of the above named well.

H. L. Wilson H. L. Wilson

and sworn to before me this 29th day of August, 1967

Judie K. Eby
Judie K. Eby Notary Public.

My Commission Expires: 9-14-70

