

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Bldg.
Wichita, Kansas 67202


Form CP-4
Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit

COUNTY Barber SEC. 19 TWP. 33S RGE. 12 W/W
Location as in quarters or footage from lines:

NE - NE
Lease Owner Roach Group
Lease Name Roach Well No. 1
Office Address Box 447 Great Bend Kan
Character of Well (Completed as Oil, Gas or Dry Hole): dry
Date Well Completed 7-3-80
Application for plugging filed 3-21-83
Plugging commenced 4-19-83
Plugging completed 4-21-83
Reason for abandonment of well or producing formation dry

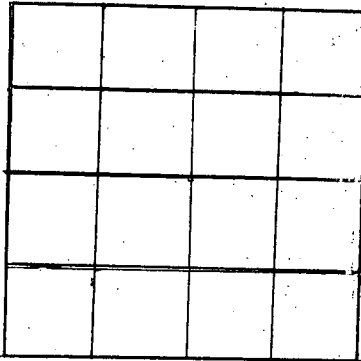

Locate Well
correctly on above
Section Platt.

Was permission obtained from the Conservation Division or it's
Agent's before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Bud Metz
Producing formation _____ Depth to top 4405 bottom 4516 T.D. 4640
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
		0	402	8 7/8	402	3000 0
		0	4640	4 1/2	4640	


Describe in detail the manner in which the well was plugged, indicating where the mud
fluid was placed and the method or methods used in introducing it into the hold. If cement
or other plugs were used, state the character of same and depth placed, from _____ feet
to _____ feet for each plug set. squeezed perfs 25 sk cement
plugged top, threw 4 1/2 casing as pulled
2000' - 10 sk gel
1300' - 50 sk cement
900' - 10 sk gel
430' - 50 sk cement
30' - 30 sk cement (circulated to top)
taped off with 35 sk cement cement - 50/50 pos.
2 1/2 gal
3 3/4 CC

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____

STATE OF KANSAS COUNTY OF BARTON, ss:

Keith W. Barlow (employee of owner) or (owner or operator) of the
above-described well, being first duly sworn on oath, says: That I have knowledge of the
facts, statements, and matters herein contained and the log of the above-described well as
filed and that the same are true and correct. So help me God.



(Signature) Keith W. Barlow
Great Bend Kan
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of May, 19 83

Julie L. Piland
Notary Public.

My Commission expires: 9-24-84

RECEIVED
STATE CORPORATION COMMISSION

MAY 20 1983

CONSERVATION DIVISION
Wichita, Kansas