

15-165-00017-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail & Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

RUSH County, Sec. 18 Twp. 19 Rge. 16 (E) (W)

Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines NE NE NW
Lease Owner E. H. Adair - Wm Graham
Lease Name Folkerts
Office Address 407 W-K-H Building, Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 31, 19 52
Application for plugging filed July 31, 19 52
Application for plugging approved July 31, 19 52
Plugging commenced Aug. 1, 19 52
Plugging completed Aug. 1, 19 52
Reason for abandonment of well or producing formation Barren

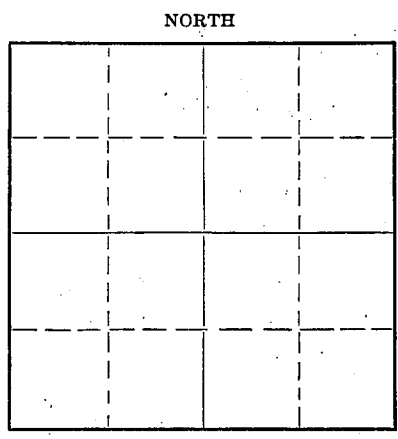

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough, Great Bend, Kansas
Producing formation Depth to top Bottom Total Depth of Well 3875 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| Formation | Content | From | To | Size | Put In | Pulled Out |
|---------------------------|---------|------|----|------|--------|------------|
| Copy of well log attached | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Placed wooden plug at 240', put 20 sx cement on plug through drill pipe filled hole with mud up to 35' of surface placed plug and filled hole with cement up to surface.

RECEIVED
STATE CORPORATION COMMISSION
AUG 14 1952
8-14-52
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor E. H. Adair Oil Company
Address Wichita 2, Kansas

STATE OF Kansas COUNTY OF Sedgwick
Russell I. Baker (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) Russell I. Baker

SUBSCRIBED AND SWORN to before me this 13th day of August, 1952
September 15th, 1953 Notary Public.

PLUGGING
FILE SEC 18 T 19 R 16 W
BOOK PAGE 35 ME 8

15-16S-0007-0000

E. H. ADAIR OIL COMPANY

Sec. 18 T. 19 R. 16 W

FOLKERTS Well No. 1

NE NE NW

Comn. 7/18/52 Comp. 7/31/52

RUSH COUNTY, KANSAS

Total Depth 3875'

Elevation 2096 KB
2093 DF

260' 8 5/8" s/csg, 175 Sx Cement.

Dry

| | |
|------------------|-----------|
| Lime | 0-75 |
| Shale & Shells | 75-100 |
| Lime & Shale | 100-256 |
| Shale | 256-490 |
| Shale & Sand | 490-500 |
| Sand | 500-615 |
| Red Sand & Shale | 615-773 |
| Red Sand | 773-920 |
| Red Sand & Shale | 920-1171 |
| Anhydrite | 1171-1190 |
| Shale | 1190-1941 |
| Lime & Shale | 1941-1970 |
| Lime | 1970-2115 |
| Lime & Shale | 2115-2248 |
| Lime | 2248-2338 |
| Shale | 2338-2430 |
| Lime & Shale | 2430-2530 |
| Shale & Shells | 2530-3186 |
| Shale & Lime | 3186-3264 |
| Lime | 3264-3430 |
| Shale & Lime | 3430-3445 |
| Shale & Shells | 3445-3510 |
| Lime & Shale | 3510-3525 |
| Lime | 3525-3835 |
| Conglomerate | 3835-3866 |
| Lime | 3866-3875 |

Rotary

Certified correct
Russell O Baker

RECEIVED
CORPORATION COMMISSION
AUG 14 1952
8-14-52
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 18 T. 19 R. 16 W
WELL NO. 1