

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-077-21915-00-00  
Spot: SENW Sec/Twnshp/Rge: 3-34S-8W  
1980 feet from N Section Line, 1980 feet from W Section Line  
Lease Name: HALBOWER 'A' Well #: #2-3  
County: HARPER Total Vertical Depth: 4740 feet

Operator License No.: 5003  
Op Name: MCCOY PETROLEUM CORPORATION  
Address: 8080 E CENTRAL STE 300  
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4737	3600	150 SX
SURF	8.625	270		175 SX

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 10/02/2013 12:00 AM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE Phone: (316) 636-2737

Proposed Plugging Method: PUMP 35 SX CEMENT ON BOTTOM. REC PIPE. 35 SX 1350', 35 SX 900'. CIRC 300'-0'.

Plugging Proposal Received By: B. J. HOPE Witness Type: PARTIAL  
Date/Time Plugging Completed: 10/07/2013 6:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

PUMPED 35 SX CEMENT TO CEMENT OFF PERFS. REC 3600' OF 5 1/2" CASING.  
PULLED CASING TO 1350' SPOTTED 35 SX CEMENT. PULLED CASING TO 950' &  
SPOTTED 35 SX CEMENT. PULLED CASING TO 300' & CIRCULATED CEMENT TO  
SURFACE WITH 125 SX CEMENT.

Perfs:

Top	Bot	Thru	Comments
4715	4725	CSG	
4706	4715	CSG	
4668	4682	CSG	
4648	4658	CSG	

RECEIVED  
KANSAS CORPORATION COMMISSION

OCT 16 2013

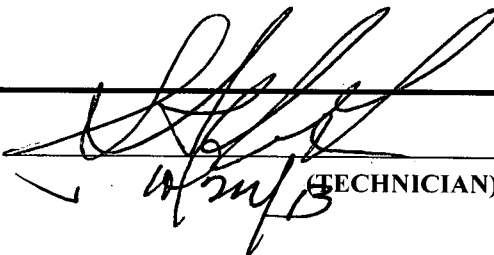
CONSERVATION DIVISION  
WICHITA, KS

Remarks: QUALITY WELL SERVICE 60/40 4% GEL

Plugged through: CSG

District: 02

Signed

  
(TECHNICIAN)