

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-051-23630-00-00
Spot: NESWSESE Sec/Twnshp/Rge: 29-14S-18W
603 feet from S Section Line, 781 feet from E Section Line
Lease Name: IRVIN Well #: 1
County: ELLIS Total Vertical Depth: 3658 feet

Operator License No.: 5798
Op Name: WEILERT, MICHAEL D. DBA MICHAEL
Address: 866 230TH AVE
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	3658		100 SX
SURF	8.625	216		150 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/08/2013 10:00 AM
Plug Co. License No.: 32332 Plug Co. Name: FISCHER WELL SERVICE, INC.
Proposal Rcvd. from: MICHAEL WEILERT Company: MICHAEL D WEILERT OIL CO. Phone: (785) 650-5450

Proposed Plugging Method: Ordered 375 sx 60/40 pozmix 4% gel cement, 15 sx gel and 600 # hulls.
Squeezed 30 sx common cement at 3638 - 3642'.
PBTB - 3390'. Well has DV with 250 sx cement according to operator

GPS: 38.80010 -099.33972
571' FSL 671' FEL
NE SW SE SE

Plugging Proposal Received By: PAT STAAB WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 10/08/2013 2:00 PM KCC Agent: PAT STAAB

Actual Plugging Report:

Fischer Well Service ran in hole with tubing to 3050'. SOS rigged to tubing and mixed and pumped 15 sx gel followed by 50 sx cement w/150 # hulls mixed in. Pulled tubing to 1650' and mixed and pumped 200 sx cement w/350 # hulls to circulate cement to surface. Pulled tubing. Topped off 5 1/2" casing with 100 sx cement and 100 # hulls mixed in. Hole standing full. Rigged to 8 5/8" casing and pumped 25 sx cement w/250 psi. Shut in pressure 250 psi.

Perfs:

Top	Bot	Thru	Comments
3638	3642		

RECEIVED
KANSAS CORPORATION COMMISSION

OCT 15 2013

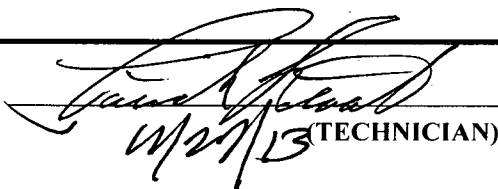
CONSERVATION DIVISION
WICHITA, KS

Remarks: SOS TICKET # 1123

Plugged through: TBG

District: 04

Signed


(TECHNICIAN)

CM

OCT 09 2013