

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-093-21587-00-01  
Spot: NE Sec/Twnshp/Rge: 22-22S-35W  
3960 feet from S Section Line, 1320 feet from E Section Line  
Lease Name: ROONEY Well #: 11-22  
County: KEARNY Total Vertical Depth: 2869 feet

Operator License No.: 32864  
Op Name: XTO ENERGY INC.  
Address: 210 PARK AVE STE 2350  
OKLAHOMA CITY, OK 73102

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		2482		WITH 5 SX CMT
PROD	5.5	2865	0	WITH 575 SX CMT
SURF	8.625	217		WITH 190 SX CMT

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 09/06/2013 9:30 AM  
Plug Co. License No.: 33338 Plug Co. Name: ORR ENTERPRISES, INC.  
Proposal Revd. from: ALAN Company: ORR ENTERPRISES, INC. Phone: (580) 251-9618

Proposed Plugging Method: Set CIBP @ 2482. Circulate hole w/ 9.0 ppg mud & cap CIBP w/ 5 sks cement. Pull up to 2070', spot 20 sks cement to cover Anhydrite formation. Pull up to 500', pump 50 sks cement & circulate to surface (BTW @ 450'). Top out w/ 5 sks Class C cement. Fill 8 5/8" x 5 1/2" annulus w/ 5 - 10 sks cement. Weld on ID plate & restore location.

Plugging Proposal Received By: RICHARD LACEY Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 09/06/2013 1:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

CIBP @ 2482' WITH 5 SX CMT. 1ST PLUG AT 2070' WITH 20 SX CMT. 2ND PLUG AT 1000'-0' WITH 100 SX CMT. TOOH W/TBG. TOP OFF 5 1/2" CASING WITH 5 SX CMT. PUMP 10 SX CMT DOWN THE ANNULUS TO 300#.

Perfs:

Top	Bot	Thru	Comments
2620	2630		
2532	2542		

KCC WICHITA

SEP 12 2013

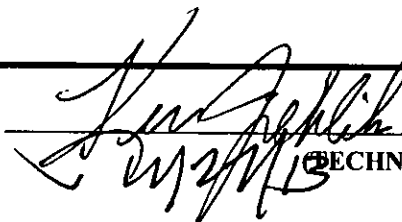
RECEIVED

Remarks: USED CLASS C COMMON CEMENT BY ORR ENTERPRISES

Plugged through: TBG

District: 01

Signed

  
(TECHNICIAN)

RECEIVED

SEP 10 2013

KCC DODGE CITY

AMJ