

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGIN
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-003-22727-00-00
Spot: SWNWNWSW Sec/Twnshp/Rge: 22-22S-19E
2145 feet from S Section Line, 5115 feet from E Section Line
Lease Name: CLEAVER/TINSLEY Well #: 3
County: ANDERSON Total Vertical Depth: 880 feet

Operator License No.: 33097
Op Name: SOUTHERN STAR CENTRAL GAS PIPE
Address: 4700 HWY 56
OWENSBORO, KY 42301

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	2.875	876		0 SX
SURF	6	20		0 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 07/01/2013 12:00 AM
Plug Co. License No.: 6372 Plug Co. Name: SPLANE PULLING AND ROUSTABOUT SERVICE, INC.
Proposal Revd. from: STERLING BARKER Company: _____ Phone: (785) 448-4816

Proposed Plugging Method: Run workstring to TD, cement to surface, tie to 2.875" squeeze untill desired pressure and volume is achieved. Dig out, cut and cap 3' below surface.

Plugging Proposal Received By: FORREST SUTHERLAND WitnessType: NONE
Date/Time Plugging Completed: 07/09/2013 12:00 AM KCC Agent: FORREST SUTHERLAND

Actual Plugging Report:

TIED ONTO TUBING AND SQUEEZED CEMENT UNTIL PRESSURE STARTED TO CLIMB. INSERTED CEMENT PLUG INTO TUBING AND PUMPED DOWN TO 750'. BOND LOGGED WELL. RAN WORKSTRING TO 750', PUMPED CEMENT TO SURFACE. PULLED WORKSTRING OUT AND TOPPED WELL OFF WITH CEMENT. 77 SACKS USED TO PLUG WELL.

Perfs:

RECEIVED
OCT 30 2013
KCC Chamute Dist. #3

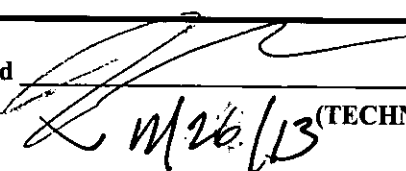
FS

Remarks:

Plugged through: TBG

District: 03

Signed


(TECHNICIAN)

KCC WICHITA Form CP-2/3

NOV 01 2013

RECEIVED