

8-18-88

1 061130

API NUMBER 15-NA 15-007-00652-00-00

To: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING SECTION  
200 COLORADO DERBY BUILDING  
WICHITA, KANSAS 67202

TECHNICIAN'S PLUGGING REPORT

Operator License # 5364

Operator: Beren Corporation

Name & Address Box 723

Hays, KS 67601

C NE NE, SEC. 21, T 31 S, R 13 W/4EX

4620 feet from S section line

660 feet from E section line

Lease Name Sun Smith Well # 1

County Barber

150.64

Well Total Depth 4635 feet

Conductor Pipe: Size \_\_\_\_\_ feet

Surface Casing: Size 13 3/8 feet 256

Abandoned Oil Well  Gas Well \_\_\_\_\_ Input Well \_\_\_\_\_ SWD Well \_\_\_\_\_ D&A \_\_\_\_\_

Other well as hereinafter indicated \_\_\_\_\_

Plugging Contractor Beren Corporation License Number 5364

Address Box 723, Hays, KS 67601

Company to plug at: Hour: 9 a.m. Day: 18 Month: 8 Year: 19 88

Plugging proposal received from Sid Thompson

(company name) Beren Corporation (phone) 913-628-6101

were: 4 1/2" at 4634' Perfs at 4545-47' Elevation 1623'GL

1st plug pump 3 sx hulls, 30 sx cement, 10 sx gel, release wiper plug and pump 125 sx cement,

2nd plug pump 45 sx cement down annulus.

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 23 1988

Plugging Proposal Received by Paul Luthi

(TECHNICIAN)

Plugging Operations attended by Agent?: All  Part \_\_\_\_\_ None \_\_\_\_\_

Operations Completed: Hour: 10:30 a.m. Day: 18 Month: 8 Year: 19 88

ACTUAL PLUGGING REPORT 1st plug pumped 3 sx hulls, 30 sx cement, 10 sx gel, released

13 3/8" wiper plug and pumped 125 sx cement.

2nd plug pumped 45 sx cement down annulus.

Maximum pressure on 4 1/2" - 2000 psi and shut in 1500 psi.

Maximum pressure on 13 3/8" - 400 psi and shut in 400 psi.

Remarks: Used 60/40 Pozmix 6% gel by B.J. Titan. No casing recovery.


(If additional description is necessary, use BACK of this form.)

INVOICED  
I (holder) acknowledge and agree to pay for this plugging.

DATE 8-24-88

Signed Paul A. Luthi  
(TECHNICIAN)

INV. NO. 21901

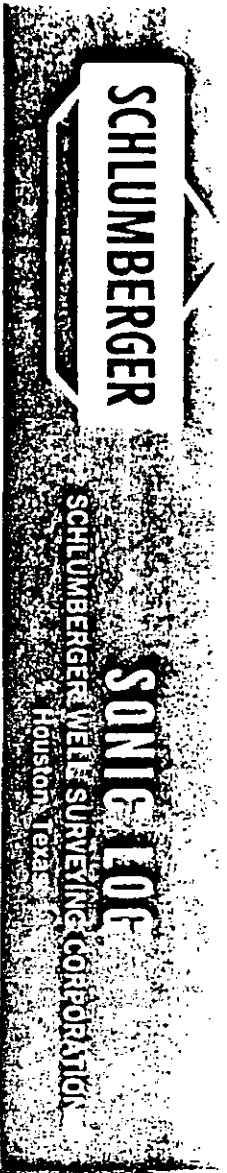

COUNTY \_\_\_\_\_  
FIELD or LOCATION \_\_\_\_\_  
WELL \_\_\_\_\_  
COMPANY \_\_\_\_\_

COMPANY SUNRAY D.A.  
WELL SMITH NO. 1  
FIELD WARRANT  
LOCATION 21-313-1300  
COUNTY BHASKIN  
STATE ARKANSAS

Other Surveys W.R. COM  
Location of Well WARRANT  
Elevation: K.B.: 1637  
D.F.: 1631  
or G.L.: 1625

Log Depths Measured From 29.15 Ft. above \_\_\_\_\_

RUN No.	Date	First Reading	Last Reading	Feet Measured	Csg. Schlum.	Csg. Driller	Depth Reached	Bottom Driller	Mud Nat.	Dens. Visc.	Mud Resist.	Res. BHT	pH	Wir. Loss	Rmf	BH Size	Spacing:
1	1/16/88	11.3	11.3	11.3													
2	1/16/88	11.3	11.3	11.3													
3	1/16/88	11.3	11.3	11.3													

FOLD HERE

RKS VLC No.: \_\_\_\_\_  
VLS No.: \_\_\_\_\_  
VLP No.: \_\_\_\_\_

Velocity (feet per second) \_\_\_\_\_ Interval Transit Time (microseconds per foot) 1,000,000

