


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

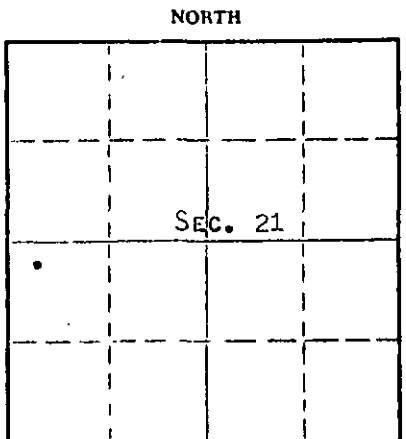

Locate well correctly on above Section Plat

BARBER County, Sec. 21 Twp. 32S Rge. 12 K&K (W)
Location as "NE/CNW&SW" or footage from lines. NW NW SW
Lease Owner PETROLEUM, INC.,
Lease Name KIRKBRIDE Well No. 1
Office Address R.R. #2, GREAT BEND, KANSAS
Character of Well (completed as Oil, Gas or Dry Hole) OIL WELL
Date well completed DECEMBER 9 19 56
Application for plugging filed JUNE 13 19 68
Application for plugging approved JUNE 13 19 68
Plugging commenced JUNE 24 19 68
Plugging completed JUNE 27 19 68
Reason for abandonment of well or producing formation DEPLETION OF PRODUCING ZONE
If a producing well is abandoned, date of last production. MAY 23 19 68
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well R. J. WARREN
Producing formation MISSISSIPPI Depth to top 4373 Bottom 4475 Total Depth of Well 4478 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
MISSISSIPPI	SLIGHT AMOUNT OF OIL & WATER	4384'	4394'	8-5/8"	286'	NONE
				5 1/2"	4472'	3800'

RECEIVED
STATE CORPORATION COMMISSION
JUL 11 1968
CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGED BACK WITH SAND FROM 4478' TO 4300'. DUMPED 5 SACKS CEMENT FROM 4300' TO 4260'. HEAVY MUD TO 260'. SET 10' ROCK BRIDGE FROM 260' TO 250'. DUMPED 25 SACKS CEMENT FROM 250' TO 175'. HEAVY MUD FROM 175' TO 40'. SET 10' ROCK BRIDGE FROM 40' TO 30'. DUMPED 10 SACKS CEMENT FROM 30' TO BASE OF WELL CELLAR.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor RUSS CASING PULLING, INC.,
Address BOX 1082, GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.
MONTE CHADD (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. MONTE CHADD, DIST. PROD. SUPT.

(Signature) *Monte Chadd*
R.R. #2, GREAT BEND, KANSAS (Address)

SUBSCRIBED AND SWORN to before me this 9 day of JULY, 19 68

My commission expires MAY 28, 1969 *Richard H. Dumber* Notary Public.

WELL LOG

COMPANY PETROLEUM, INCORPORATED

SEC. 21 T. 32S R. 12W

FARM Kirkbride

NO. 1


LOC. NW, NW, SW

TOTAL DEPTH 4475'

COUNTY Barber Co., Kansas

COMM. November 18, 1956 COMP. December 1, 1956

CONTRACTOR GARVEY DRILLING COMPANY



CASING 8 5/8" @ 286' W/200 sax.
5 1/2" @ 4472' W/100 sax.

ELEVATION 1580' DF

PRODUCTION Mississippian

FIGURES INDICATE BOTTOM OF FORMATIONS

287	Red rock	Heebner	3665'
530	Shale, shells & red rock	Douglas Sh	3742'
1400	Shale & shells	Douglas Sd	3808'
1890	Lime & shale	Lansing	3828'
2315	Lime		
3225	Lime & shale		
3303	Lime		
3650	Shale & lime		
3830	Lime, shale & sand		
4015	Lime		
4093	Lime & shale		
4300	Lime		
4375	Shale & lime		
4425	Chert		
4458	Miss. chat		
4475	Miss. lime		

RECEIVED
STATE CORPORATION COMMISSION
JUL 11 1968
CONSERVATION DIVISION
Wichita, Kansas

State of KANSAS

County of BARTON

} ss:

I, Verne A. Morris of Garvey Drilling Co.

upon oath state that the above and foregoing is a true and correct copy of the log of the #1 Kirkbride well

Verne A. Morris

Subscribed and sworn to before me this 18th day of December 19 56

My Commission Expires: July 11, 1960

[Signature]
NOTARY PUBLIC