


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Barber County. Sec. 21 Twp. 32S Rge. 12 E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW NE SW

Lease Owner Graves Drilling Co., Inc.  
Lease Name Henry Well No. 1  
Office Address 910 Union Center, Wichita, Kansas 67202  
Character of Well (Completed as Oil, Gas or Dry Hole) Dryhole  
Date Well completed November 25 1977  
Application for plugging filed November 25 1977  
Application for plugging approved November 25 1977  
Plugging commenced November 25 1977  
Plugging completed November 25 1977  
Reason for abandonment of well or producing formation

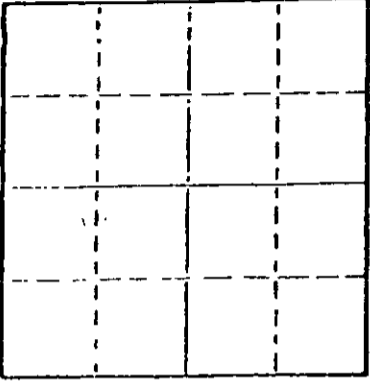

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well William T. Owen, Pratt, Kansas  
Producing formation Depth to top Bottom Total Depth of Well  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	240'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 240 feet. Pumped 40 sacks of cement through drill pipe with pump truck. Pushed plug and 1/2 sack hulls to 40' and pumped 12 sacks of cement through drill pipe with pump truck to base of well cellar. Plugged rat hole with 3 sacks of cement.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Graves Drilling Co., Inc.  
910 Union Center, Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF SEDGWICK, ss.  
Betty Brandt (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Betty Brandt  
910 Union Center, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of November, 1977



Courtney M. Graves  
Courtney M. Graves Notary Public.

My commission expires 2-2-80

RECEIVED  
STATE CORPORATION COMMISSION

NOV 30 1977

CONSERVATION DIVISION  
Wichita, Kansas

ROTARY DRILLERS' LOG

OPERATOR: Graves Drilling Co., Inc. DRILLING COMMENCED: November 18, 1977  
910 Union Center  
Wichita, Kansas 67202

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: November 25, 1977  
910 Union Center  
Wichita, Kansas 67202

CASING RECORD: 5 Jts. 222' 8-5/8" LOCATION: Henry No. 1  
cemented with 185 sacks. NW NE SW  
Section 21-32S-12W  
Barber County, Kansas

0 - 222 Red Bed  
222 - 424 Red Bed & Shale  
424 - 1365 Shale & Lime  
1365 - 1796 Lime & Shale  
1796 - 3305 Shale & Lime  
3305 - 3913 Shale  
3913 - 4253 Shale & Lime  
4253 - 4385 Lime & Shale  
4385 - 4425 Lime & Chert  
4425 Rotary Total Depth

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

GRAVES DRILLING CO., INC.

By Petty P. Bessent  
Sec. - Treasurer

STATE OF KANSAS )  
SEDGWICK COUNTY ) ss.

Subscribed and sworn to before me, a Notary Public, this 29th of November, 1977.

My commission expires:  
February 2, 1980

Courtney M. Graves  
Courtney M. Graves Notary Public



RECEIVED  
STATE CORPORATION COMMISSION

NOV 30 1977

CONSERVATION DIVISION  
Wichita, Kansas