

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Barber County, Sec. 21 Twp. 32S Rge. (E) 12 (W)

Location as "NE/CNW/SW" or footage from lines C SW SW

Lease Owner K. & E. Drilling, Inc.

Lease Name Kirkbride Well No. 1

Office Address 816 Union Center, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed December 31, 19 71

Application for plugging filed December 31, 19 71

Application for plugging approved December 31, 19 71


Plugging commenced December 31, 19 71

Plugging completed December 31, 19 71

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

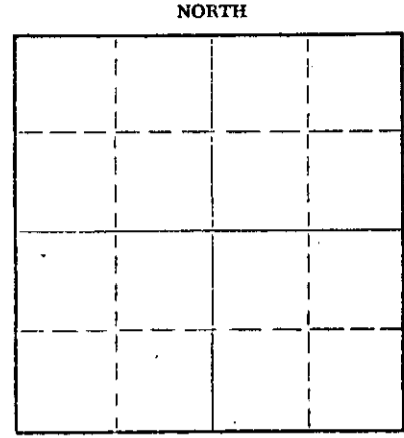

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well _____

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4416 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	222'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mudded up with heavy mud to 200 feet. Followed by wooden plug, 1/2 sack hulls and 25 sacks cement. Mudded up to 40 feet with heavy mud followed by wooden plug, 1/2 sack hulls and 10 sacks cement to base of well cellar. Plugged rat hole with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
JAN 5 1972
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Graves Drilling Co., Inc.

Address 505 Union Center, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF BUTLER, ss.
John C. Graves (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John C. Graves

505 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of January, 19 72

Commission expires May 9, 1975
Betty Brandt
Betty Brandt Notary Public.

ROTARY DRILLERS' LOG

OPERATOR: K & E Drilling, Inc. DRILLING COMMENCED: December 18, 1971
816 Union Center
Wichita, Kansas 67202

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: December 31, 1971
505 Union Center
Wichita, Kansas 67202

CASING RECORD: 6 Jts. 222' 8-5/8" LOCATION: Kirkbride No. 1
cemented with 200 sacks C SW SW
Section 21-32S-12W
Barber County, Kansas

0 - 131 Surface soil
 131 - 700 Red bed
 700 - 998 Shale & red bed
 998 - 1345 Red bed & shale
 1345 - 1355 Anhydrite
 1355 - 1721 Shale & lime streaks
 1721 - 1752 Lime
 1752 - 3046 Lime & shale
 3046 - 3250 Shale & lime
 3250 - 3330 Lime
 3330 - 3624 Shale & lime
 3624 - 3695 Sand & shale
 3695 - 3720 Shale
 3720 - 3800 Sand & shale
 3800 - 4295 Lime
 4295 - 4365 Shale & lime
 4365 - 4396 Cherty lime
 4396 - 4416 Chert
 4416 Rotary Total Depth

RECEIVED
STATE CORPORATION COMMISSION
JAN 5 1972
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

GRAVES DRILLING CO., INC.

By *John Graves*
President

STATE OF KANSAS)
) ss.
BUTLER COUNTY)

Subscribed and sworn to before me, a Notary Public, this 4th of January, 1972.

My commission expires:
May 9, 1975

Betty Brandt
Betty Brandt Notary Public