


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

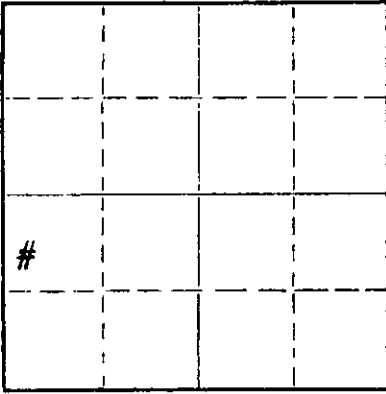

Locate well correctly on above
Section Plat

Barber County. Sec. 10 Twp. 31 Rge. 13 (E) W (W)
Location as "NE/CNW&SW" or footage from lines SW/NW/SW
Lease Owner Petroleum Management Inc.
Lease Name Maddix Well No. 1
Office Address 1515 Wichita Plaza Wichita, Ka.
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced Mar. 27, 1965
Plugging completed Mar. 31, 1965
Reason for abandonment of well or producing formation No longer a producer.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4327' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	278'	None
				5 1/2	4325'	3928'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand from 4327' to 4250'. Mixed and dumped 3 sx. of cement from 4250' to 4214' with dump bailer. Pulled casing. Mudded hole to 270'. Set 10' rock bridge from 270' to 260'. Mixed and dumped 25 sx. of cement from 260' to 185'. Mudded hole from 185' to 40'. Set 10' rock bridge from 40' to 30'. Mixed and dumped 10 sx. of cement from 30' to base of the cellar.

RECEIVED
STATE CORPORATION COMMISSION
MAY 3 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ace Pipe Pulling Co.
Address Box 304 Great Bend, Ks.

STATE OF Kansas, COUNTY OF Sedgwick, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of April, 19 65

My commission expires April 23, 1966

Marie C. Murphy
Marie C. Murphy Notary Public.

WELL LOG

COMPANY: Petroleum Management, Inc.
 CONTRACTOR: Bowers Drilling Company, Inc.
 FARM: Maddix #1
 LOCATION: SW NW SW Section 10-31-13W,
 Barber County, Kansas
 COMMENCED: 12-16-63
 COMPLETED: 1-1-64
 ELEVATION: 1686 Derrick Floor

0 - 1065	Shale	Set 805/8" at 278' with 225 sax
1065 - 1773	Shale and Shells	
1773 - 1930	Shale and lime	
1930 - 2450	Lime	
2450 - 3905	Lime and Shale	
3905 - 4325	Lime	Set 4 1/2" at 4324
4325	T. D.	

RECEIVED
 STATE CORPORATION COMMISSION

MAR 23 1965

CONSERVATION DIVISION
 Wichita, Kansas

LOG TOPS:

Heebner	3651	Lansing	3811
Douglas	3683	Massey	4260
Douglas Sand	3780	Mississippi	4291

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I, Emil E. Bowers, do hereby certify that the above and foregoing is a true and correct copy of the copy of the log of the #1 Maddix located SW NW SW Section 10-31S-13W, Barber County, Kansas, as reflected by the files of Bowers Drilling Company, Inc.

Emil E. Bowers

Subscribed and sworn to before me, a Notary Public in and for Sedgwick County, Kansas, this 7th day of January, 1964.

Donna F. Miller
 Donna F. Miller, Notary Public

My commission expires May 1, 1966.