

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Barber County, Sec. 8 Twp. 34S Rge. 11 (E) (W) X

Location as "NE/CNW/SW" or footage from lines. NW 1/4

Lease Owner Leben Drilling, Inc.

Lease Name Groendyke Well No. 1

Office Address P. O. Box 1186 Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed 3-9-67 19__

Application for plugging approved 3-10-67 19__


Plugging commenced 4-27-67 19__

Plugging completed 5-2-67 19__

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

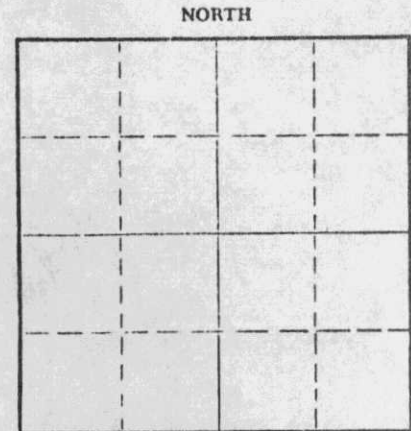

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well _____

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4550 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	290	None
				4 1/2	None	3801

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Moved in. Rigged up.

Sanded to 4550'. Dumped 5 sacks of cement. Cleaned out cellar. Working pipe.

Working pipe. Shot pipe at 4100' and 4000'.

Working pipe. Shot pipe at 3900' and 3790'. Pulling pipe.

Pulling pipe. Plugging well. Set rock bridge at 280'. Dumped 25 sacks of cement. Filled hole and rock bridge. Capped well with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
MAY 15 1967
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.

Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss. J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
P. O. Box 221 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 12 day of May, 19 67

My commission expires May 27, 1969 _____ Notary Public.

WELL LOG

RECEIVED
STATE CORPORATION COMMISSION

APR 26 1967

CONSERVATION DIVISION
Wichita, Kansas

Leben Drilling, Inc.

Groendyke No. 1

Sec. 8-34S-11W

NW 1/4

Barber County, Kansas

Casing

8 5/8" 290' 275 sacks

5 1/2" 4550'

0	335	Redbed
335	1280	Shale, Shells
1280	1765	Lime, Shale
1765	2012	Lime
2012	2977	Lime, Shale
2977	3170	Lime
3170	3510	Lime, Shale
3510	3743	Shale, Sand
3743	4450	Lime
4450	4527	Lime, Chert
4527	4550	Lime
	<u>4550</u>	<u>RTD - Set 5 1/2" Casing</u>

8 5/8" new 20# surface casing set at 290' cemented with 275 sacks cement, 2% cc, 2% salt

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Groendyke #1 Well, located NW 1/4 of Section 8, Township 34South, Range 11 West, Barber County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite

STATE OF KANSAS)
) SS
COUNTY OF BARTON)

Subscribed and sworn to and before me a Notary Public, in and for Barton County, Kansas, this 17th day of December, 1966.

Ulanda Nichols

My Commission Expires:
April 1, 1967