


15-095-00357-00-01

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

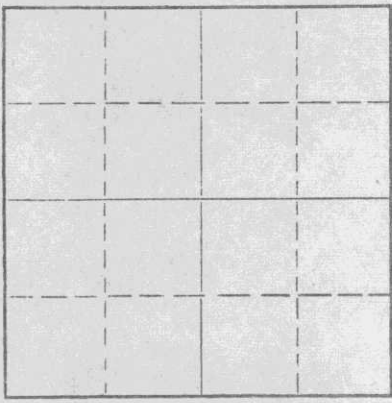

Locate well correctly on above Section Plat

Kingman County, Sec. 35 Twp. 27 Rge. 6 (E) W (W)
Location as "NE/CNW/SW" or footage from lines C NW NE
Lease Owner Mack Oil Company
Lease Name Rollmann Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19____
Application for plugging filed 19____
Application for plugging approved 19____
Plugging commenced 10-23-63 19____
Plugging completed 10-24-63 19____
Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3875 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	254'	None
				2-7/8"	3875'	3443'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pumped in 10 sacks of cement and displaced with 18 bbls. of water. Pulled 2-7/8" tubing, set rock bridge @ 270' and pumped 25 sacks of cement. Mudded to 40', set rock bridge to 30' and ran 10 sacks of cement to cap well.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION

NOV 14 1963
11-1463

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or ~~owner~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of October, 1963

Milton J. Volin
Notary Public.

My commission expires May 20, 1964

