

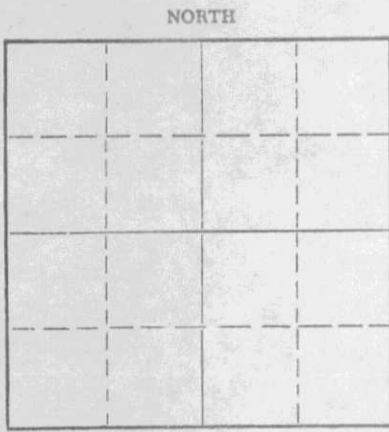
STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Barber County, Sec. 30 Twp. 31S Rge. (X) 15 (W)

Location as "NE/CNW%SW%" or footage from lines C SE NE
Lease Owner Dunne-Gardner Drilling Co., Inc.
Lease Name Rusk Well No. 1
Office Address 300 Schweiter Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed January 2, 19 65
Application for plugging filed January 5, 19 65
Application for plugging approved 19
Plugging commenced January 2, 19 65
Plugging completed January 2, 19 65
Reason for abandonment of well or producing formation dry hole



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Archie V. Elving
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface pipe		-0-	280'	8-5/8"	12-19-64	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 260', set plug with 2 sacks cement and 1/2 sack hulls, 25 sacks cement. Mud to 40', 2 sacks cement and 1/2 sack hulls, set plug with 10 sacks cement. 2 sacks cement in rathole.

RECEIVED
STATE CORPORATION COMMISSION

JAN 6 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor
Address

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Don Gardner (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
300 Schweiter Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of January, 19 65

My commission expires November 9, 1965

[Signature]
Marilyn E. Fox Notary Public.

DRILLER'S LOG

OPERATOR: Dunne-Gardner Drilling Co., Inc.,
300 Schweiter Building, Wichita, Kansas

CONTRACTOR: Dunne-Gardner Drilling Co., Inc.

LEASE: RUSK

WELL: #1

LOCATION: C SE NE Section 30-31S-15W
Barber County, Kansas

DATE COMMENCED: December 18, 1964

DATE COMPLETED: January 2, 1964

CASING: Set 8-5/8" surface pipe at 280' with 225 sacks of
cement and 8 yds. chat

<u>FROM</u>	<u>TO</u>	
0	140	Red Bed and Sand
140	260	Red Bed and Shale
260	545	Red Bed, Shale and Gypsum
545	923	Red Bed and Shale
923	1345	Shale
1345	1750	Shale and Shells
1750	2215	Shale and Lime
2215	2295	Lime
2295	4015	Lime and Shale
4015	4143	Lime and Chalk
4143	4280	Lime and Shale
4280		Total Depth


RECEIVED
STATE CORPORATION COMMISSION

JAN 14 1965


CONSERVATION DIVISION
Wichita, Kansas

I certify the above to be true and correct to the best of my knowledge and belief.

DUNNE-GARDNER DRILLING CO., INC.

By 
Don Gardner

Subscribed and sworn to before me this 13th day of January, 1965.


Marilyn E. Fox, Notary Public

My Commission Expires:
November 9, 1965