


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Bldg.  
Wichita, Kansas 67202

Form CP-4  
Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit

COUNTY Harper SEC. 8 TWP. 32S RGE. 8W E/W  
Location as in quarters or footage from lines:  
C/SE NW

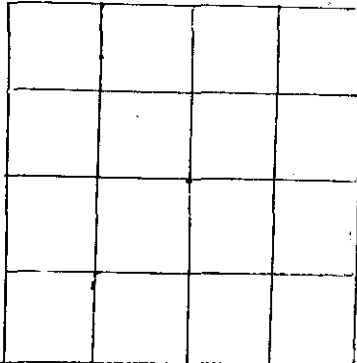

Locate Well  
correctly on above  
Section Platt.

Lease Owner Jay C. Boyer  
Lease Name Hadsall Well No. #1  
Office Address Box 511 Hays, Kansas 67601  
Character of Well (Completed as Oil, Gas or Dry Hole): \_\_\_\_\_  
Date Well Completed \_\_\_\_\_  
Application for plugging filed \_\_\_\_\_  
Plugging commenced 9-24-81  
Plugging completed 9-28-81  
Reason for abandonment of well or producing formation Depleted

Was permission obtained from the Conservation Division or it's  
Agent's before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Maurice V. Leslie

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ bottom T.D. 4425'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
				8-5/8"	243'	none
				5-1/2"	4402'	2157'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Moved in on location, dumped 50 sacks cement on bottom and pushed plug to 2180', got 26" stretch, shot pipe @2164', and layed down a total of 68 joints of pipe. Plugged well with 15 sacks gel, 8 sacks hulls, 10 sacks gel, 125 sacks 50/50 pos, 4% gel, 3% cc. Plugging completed.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Kelso Casing Pulling

STATE OF Kansas COUNTY OF Rice, ss.


R. Darrell Kelso (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

[Signature]  
Chase, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of September, 19 81

My Commission expires:



[Signature]  
Notary Public.  
RECEIVED  
STATE CORPORATION COMMISSION

OCT 2 1981

CONSERVATION DIVISION  
Wichita Kansas