


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

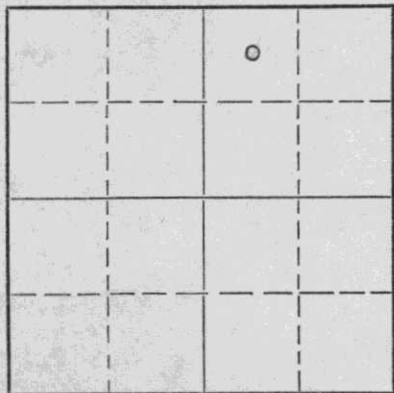

Locate well correctly on above
Section Plat

Barber

County. Sec. 5 Twp. 32 Rge. 11 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NW-NW-NE

Lease Owner PETROLEUM, Incorporated

Lease Name JONES "Q" Well No. 1

Office Address 311 East Third Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed November 25 19 55

Application for plugging filed November 30 19 55

Application for plugging approved December 14 19 55

Plugging commenced December 15 19 55

Plugging completed December 18 19 55

Reason for abandonment of well or producing formation

No producible Zones

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was com-

menced? Yes

Name of Conservation Agent who supervised plugging of this well M.A. Rives, Box 8, Pratt, Kansas

Producing formation Mississippi Depth to top 4,318 Bottom --- Total Depth of Well 4,407 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Mississippi	Water &	4,320'	4,328'	8 5/8"	260'	None
	Little Oil	4,332'	4,342'	4 1/2"	4,403'	3,800'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

(Drilled cement out to 4,368.5')

Filled hole with crushed rock from 4,368.5' to 4,300' and placed 5 sacks cement from 4,300' to 4,250'. Mudded up from 4,250' to 250' and made a solid rock bridge at 250'. Placed 20 sacks cement from 250' to 190'. Mudded up from 190' to 35' and made a solid rock bridge at 35'. Placed cement from 35' to base of well cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Morgan Well Plugging Service

Address 102 West 18th Street, Hutchinson, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

C.J. Wiltse (employee of owner) or (owner or agent) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C.J. Wiltse



Route 2, Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 19th day of December, 19 55

My commission expires November 21, 1957

24-7368-5 3-53-20M

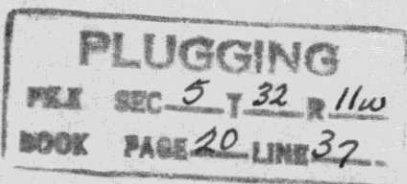

15-007-00164-0000
WELL LOG

COMPANY Petroleum, Inc.

SEC. 5 T. 32S R. 11W

FARM JONES 'Q'

NO. 1

LOC. NW NW NE
330' FNL
2310' FEL
COUNTY Barber


TOTAL DEPTH 4407'

COMM. November 3, 1955

COMP. November 19, 1955

CONTRACTOR Garvey Drilling Company

CASING 3-5/8" @ 260' w/175 sax
4-1/2" @ 4403' w/100 sax



ELEVATION 1547' DF
1549' RB


PRODUCTION Mississippian

FIGURES INDICATE BOTTOM OF FORMATIONS

260	Red Bed
465	Red Bed & Shale
1100	Red & Blue Shale
1225	Shale & Salt
3401	Lime & Shale
3580	Sand
3748	Sand & Lime
4338	Lime
4407	Chat
	R.T.D. 4407'

Sample Tops

Elgin Shale:	3381 (-1832)
Elgin Sand:	3384 (-1835)
Heebner:	3545 (-1996)
Douglas Shale:	3558 (-2009)
Douglas Sand:	3568 (-2019)
Lansing:	3723 (-2174)
Base K C:	4166 (-2617)
Ft. Scott:	4246 (-2697)
Miss. Chert:	4318 (-2769)
Miss. Lime:	4395 (-2846)

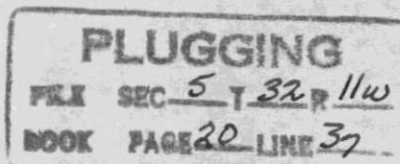

State of KANSAS }
County of SEDGWICK } SS:

I, Karl E. Becker of Petroleum, Inc.

upon oath state that the above and foregoing is a true and correct copy of the log of the JONES 'Q' #1 well

Subscribed and sworn to before me this 28th day of November 19 55

My Commission Expires: September 2, 1959

Karl E. Becker
Frances Sloan
NOTARY PUBLIC

FRANCES SLOAN, Notary Public
My Commission expires Sept. 2, 1959