


15-007-00182-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Barber County, Sec. 5 Twp. 32S Rge. (E) 11 (W)

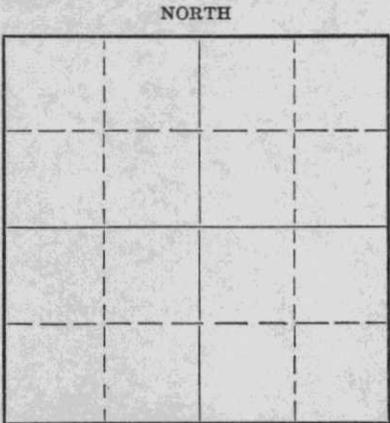

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW NW NW
Lease Owner Beardmore Drilling Company
Lease Name Jones Well No. 1
Office Address 603 Petroleum Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed March 20 19 52
Application for plugging filed March 20 19 52
Application for plugging approved March 20 19 52
Plugging commenced March 20 19 52
Plugging completed March 20 19 52
Reason for abandonment of well or producing formation Dry Hole
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well M. A. Rives, Box 118, Pratt, Kansas
Producing formation Depth to top Bottom Total Depth of Well 4326 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
		0	150	8-58	150	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from top feet to bottom feet for each plug set.

Mud to 145' with 15 Sacks Cement;
Mud to 35' with 10 sacks cement to complete.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Beardmore Drilling Company
Address 603 Petroleum Bldg., Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
I, HEBER BEARDMORE, (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Heber Beardmore
603 Petroleum Bldg., Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of March, 19 52.
Leonard P. Tolle
Notary Public.

My commission expires January 28, 1956
23-8390-s 6-51-20M

PLUGGING
FILE SEC ST 32 R 166
BOOK PAGE 3 LINE 21

MAR 27 1952
3-27-52
CONS. DIVISION
Wichita, Kansas

Jones No. 1

NW NW NW
 Section 5-32S-11W,
 Barber County, Kansas

Drilled For: Beardmore, Brann, Bird.
 Drilled by: Beardmore Drilling Company

Casing Record:

8-5/8" 150' w/100 Sacks

Drilling Commenced: March 7, 1952
 Drilling Completed: March 20, 1952

Elevation: DF 1518
 GR 1515

<u>FORMATION</u>	<u>DEPTH</u>
Red Rock - Shale	70
Shale - Shells	1280
Lime - Shale	1680
Lime Broken	2465
Shale - Shells	2735
Lime - Shale	2900
Shale - Lime	3010
Lime - Shale	3255
Lime Broken	3325
Lime - Shale	3385
Sand	3480
Lime - Shale	3740
Lime	4294
Lime Chert	4300
Lime	4326 T. D.

D & A

TOPS:

Elgin Sand	3375
Lansing	3707
Mississippian	4288

DST #1 - 3375-3385 - 10' Mud BHP 1110#, No gas.

DST #2 - 4288-4294 - 25' mud, 300# BHP, Open 1 hour.

DST #3 - 4294-4302 - 30' mud, open 1 hour, shut in 20 minutes 85# BHP

DST #4 - 4299-4326 - 630' gas cut mud, 960' water, shut in pressure 750#, Flowing Pressure, 650#.

STATE OF KANSAS

SS

COUNTY OF SEDGWICK

I, the undersigned, being duly sworn on oath state that the above and within statement is a true and correct record and log of the well drilled on the location above-described, to the best of my knowledge and belief.

Richard Beardmore

Subscribed and sworn to before me this 25th day of March, 1952.

Leonard P. Tolle
 Notary Public

My Commission Expires: January 28, 1956

RECEIVED
 STATE CORPORATION COMMISSION

MAR 27 1952
 3-27-52
 CONSERVATION DIVISION
 Wichita, Kansas

PLUGGING
 FILE SEC 51-32R-11W
 BOOK PAGE 3 LINE 11