


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Barber County, Sec. 11 Twp. 31 Rge. 11 (E) (W)

Location as "NE/CNW/SW" or footage from lines SE SE SW
Lease Owner Petroleum, Inc.
Lease Name BERGNER Well No. 1
Office Address 305 East 3rd Street, Wichita, Kansas.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed December 10, 19 53
Application for plugging filed December 10, 19 53
Application for plugging approved December 10, 19 53
Plugging commenced December 10, 19 53
Plugging completed December 10, 19 53
Reason for abandonment of well or producing formation Dry Hole

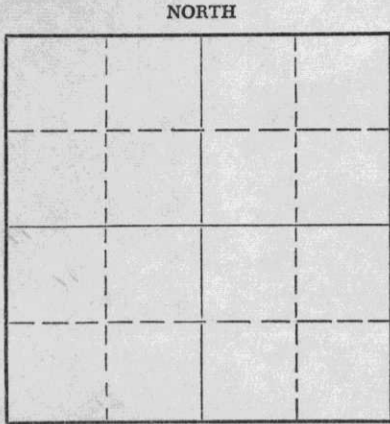

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. M. A. Rives
Producing formation Depth to top Bottom Total Depth of Well 1993 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	216'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded up to 210' and set wooden plug. Placed
1/2 sack hulls on top of plug at 210'. Cemented
and displaced 20 sacks cement through drill pipe
onto plug and hulls at 210'. Mudded up to 35'
and set second wooden plug at 35'. Filled hole to
bottom of well cellar with 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Garvey Drilling Company
Address R. R. #2, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
W. W. Fisher (employee of owner or ~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. W. Fisher
305 East Third Street, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 23rd day of December, 19 53

My commission expires October 13, 1954.

Chas. E. Mason
Notary Public.

PLUGGING
FILE SEC 11 T 31 R 11W
BOOK PAGE 142 LINE 5

RECEIVED
STATE CORPORATION COMMISSION
JAN 6 - 1954
1-6-54
CONSERVATION DIVISION
Wichita, Kansas

DRILLER'S LOG BERGNER #1

Petroleum, Inc., Operator

Section 11, Twp. 31S, Rge. 11W

Garvey Drilling Company, Contractor

Location: SE SE SW

Drilling Commenced: November 20, 1953

County: Barber County, Kansas

Drilling Completed: December 10, 1953

Production: D & A

Casing Record: 8 5/8" @ 216' w/175 sex

Figures below indicate bottom of formation:

40 Surface Clay
 140 Surface Sand
 600 Red Bed
 1730 Shale & Shells
 3935 Lime & Shale
 4230 Lime
 4307 Cherty Lime
 4391 Lime
 4517 Lime & Shale
 4563 Mississippi
 4615 Mississippi Lime
 4649 Shale
 4780 Shale & Lime
 4808 Chert
 4841 Cherty Lime
 4857 Shale
 4868 Shale & Sand
 4968 Shale
 4993 Lime
 4993 R.T.D.

Tops:

Elgin Sand: 3650 (-1868)
 Douglas Sand: 3858 (-2073)
 Lansing: 3932 (-2147)
 Mississippi: 4518 (-2733)
 Kinderhook: 4609 (-2824)
 Viola: 4764 (-2979)
 Simpson: 4842 (-2057)
 Arbuckle: 4962 (-3177)

I hereby certify that this is a true and correct log of the above mentioned well.

PETROLEUM, INC.

By W. White

STATE OF KANSAS)
) SS:
 COUNTY OF SEDGWICK)

Subscribed to and sworn to before me, a Notary Public, in said County and State, this 19th day of December, 1953.

My commission expires: October 13, 1954

Charleston H. Hester
Notary Public

PLUGGING
 FILE SEC 11 T 31 R 116
 BOOK PAGE 141 LINE 3

RECEIVED
 STATE COMMISSION
 1-6-54
 CONSERVATION DIVISION
 Wichita, Kansas