

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Bldg.
Wichita, Kansas 67202


Form CP-4
Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit

COUNTY Barber SEC. 26 TWP. 32S RGE. 12 NW
Location as in quarters or footage from lines:

C NW NE

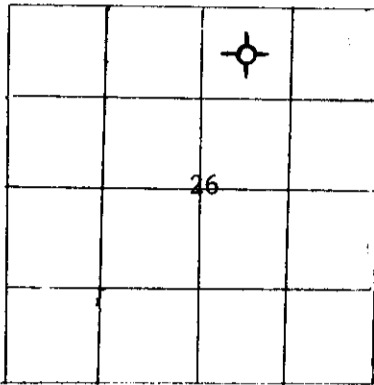

Locate Well
correctly on above
Section Platt.

Lease Owner Wild Boys & The Silver Bullet
Lease Name KINKAID 'M' (WHISKEY HILLS) Well No. 4
Office Address 807 N. Waco, Suite 3A, Wichita, Ks.
Character of Well (Completed as Oil, Gas or Dry Hole): Dry Hole
Date Well Completed 12-11-81
Application for plugging filed February 3, 1982
Plugging commenced 12-11-81
Plugging completed 12-11-81
Reason for abandonment of well or producing formation

Non-commercial

Was permission obtained from the Conservation Division or it's
Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Maurice Leslie *

Producing formation N/A Depth to top _____ bottom T.D. 4885

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
Lansing		3675		8 5/8"	480'	
Mississippi		4352				
Viola		4619				
Simpson Sand		4699				
Arbuckle		4820				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set 60 sx, plugged at 620'. Set 40 sx, plugged at 420'. Set solid bridge plug and 10 sx at 40'. Pumped 10 sx in Rathole and 5 sx in Mousehole.

Common cement + 2% Gel + 3% CaCl2 pumped into place.

Cement plug from 620' to 305'. Wooden plug at 40' and cement to surface.

Mud fluids are left in pits and backfilled in place when sufficiently dry.

RECEIVED
STATE CORPORATION COMMISSION

FEB - 4 1982

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Services

STATE OF Kansas COUNTY OF Sedgwick, ss.

R.A. CHRISTENSEN (employee of ~~owner~~) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) R.A. Christensen

(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of February, 1982

Donna Hale Ard
Notary Public.

My Commission expires: October 29, 1982

DONNA HALE ARD
STATE NOTARY PUBLIC
SEDGWICK COUNTY, KANSAS