

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Barber County, Sec. 30 Twp. 32S Rge. 12W E/W
Location as "NE/CNW\SW $\frac{1}{4}$ " or footage from lines
CE/2 SE SE


Lease Owner Clarke Corporation
Lease Name Skelly Well No. 1
Office Address Box 187, Medicine Lodge, Kansas 67104
Character of Well (Completed as Oil, Gas or Dry Hole)

Pipe split -lost hole-did not complete
Date Well completed 8-9 1980
Application for plugging filed 8-9 1980
Application for plugging approved 8-9 1980
Plugging commenced 8-1 1980
Plugging completed 8-13 1980

Reason for abandonment of well or producing formation
Lost hole
If a producing well is abandoned, date of last production
No 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Owehs
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4690
Show depth and thickness of all water, oil and gas formations.

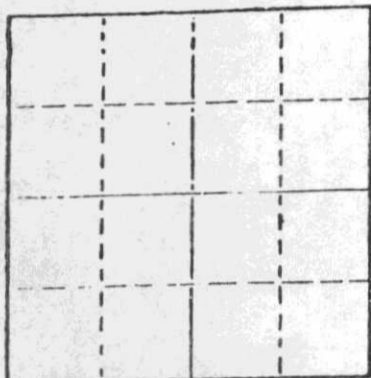

Locate well correctly on above
Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	240	None
				4 1/2	4689	1080

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Backer plug set at 4300
Split in pipe at 4007 to 4047.
Pump in 425 sacks cement and squeezed
Then at 1852 pumped in 325 sacks cement
Drilled out side of pipe at 1852 - Quit
Ripped pipe at 1080 4 1/2"
Bailed hole down to 240. Built Bridge

4 yards ready mix

RECEIVED
STATE CORPORATION COMMISSION
AUG 18 1980
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this report)

Name of Plugging Contractor Clarke Corporation

STATE OF Kansas COUNTY OF Barber, ss.
Chas R. Margenstern (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Chas R. Margenstern
Medicine Lodge, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of August, 19 80

Jessie Hamerton
Notary Public.

My commission expires April 4, 1982.