


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

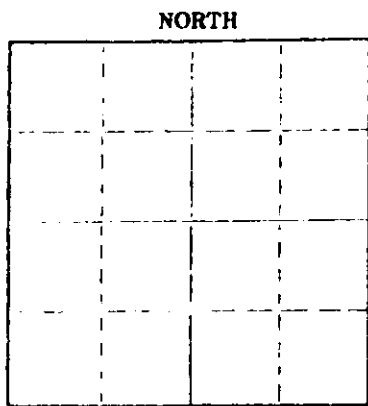

Locate well correctly on above Section Plat

Rush County, Sec. 32 Twp. 19 Rge. (E) 16 (W)

Location as "NE/CNW/SE/SW" or footage from lines. C SE NE NE  
Lease Owner H. A. Chapman Investments  
Lease Name Weber Well No. 1  
Office Address 404 Cities Service Building, Tulsa, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed November 17 1974  
Application for plugging filed November 17 1974  
Application for plugging approved November 17 1974  
Plugging commenced November 17 1974  
Plugging completed November 17 1974  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3821  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Squeezed 120 sacks 50/50 pozmix down 8 5/8" surface pipe.

RECEIVED  
STATE CORPORATION COMMISSION  
NOV 20 1974  
11-28-74  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Duke Drilling Company  
Address Box 823, Great Bend, Kansas 67530

STATE OF KANSAS COUNTY OF BARTON  
Leonard Williamson (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leonard Williamson  
Box 823, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 19th day of November, 19 74

My commission expires April 11, 1978  
Dorothy M. Hague Notary Public.

## DRILLERS' WELL LOG

DATE COMMENCED: NOVEMBER 9, 1974  
DATE COMPLETED: NOVEMBER 17, 1974

H. A. Chapman  
WEBER # 1  
C SE NE NE  
Sec. 32-T19S-R16W  
Rush County, Kansas

0 - 490'	Shale and Sand Streaks
490 - 637'	Sand
637 - 1107'	Red Bed
1107 - 1136'	Anhydrite
1136 - 1580'	Shale and Shells
1580 - 3175'	Lime and Shale
3175 - 3295'	Lime
3295 - 3383'	Lime and Shale
3383 - 3387'	Shale
3387 - 3400'	Lime and Shale
3400 - 3413'	Lime
3413 - 3453'	Shale
3453 - 3800'	Lime, Shale, Chert
3800 - 3821'	Dolomite
3821'	RTD

ELEVATION: 2056 K.B.

FORMATION TOPS

Anhydrite	1107
Topoka	3114
Heebner	3383
Toronoto	3400
Douglas	3413
Brown Lime	3453
Lansing KG	3463
Arbuckle	3800
RTD	3821

SURFACE PIPE: Set 410' of  
8 5/8", 28# used pipe #/250 sacks  
common, 3% cc.

## AFFIDAVIT

STATE OF KANSAS }  
COUNTY OF BARTON } ss.

Leonard Williamson, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Leonard Williamson

Subscribed and sworn to before me this 19th day of November, 1974.

Veronica M. Stague  
Notary Public

My Commission Expires: April 11, 1978

RECEIVED  
STATE CORPORATION COMMISSION  
11-20-74  
NOV 20 1974  
CONSERVATION DIVISION  
Wichita, Kansas